







Product comparison tables

Network video

Spring 2014









Axis fixed network cameras

AXIS M10 Series						
	AXIS M1004-W	AXIS M1013	AXIS M1014	AXIS M1033-W	AXIS M1034-W	AXIS M1054
						
Image sensor	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS
Lens	2.8 mm/F2.0 fixed iris, adjustable focus	2.8 mm/F2.0 fixed iris, adjustable focus	2.8 mm/F2.0 fixed iris, adjustable focus	2.8 mm/F2.0 fixed iris, adjustable focus	2.8 mm/F2.0 fixed iris, adjustable focus	2.9 mm/F2.0 fixed iris
Horizontal angle of view	80°	67°	80°	67°	80°	84°
Day and night						
Min illumination/light sensitivity (lux)	1.2 - 10,000	1.2 - 10,000	1.2 - 10,000	1.2 - 10,000 0 with LED on	1.2 - 10,000 0 with LED on	1.2 - 100,000 0 with LED on
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	1280x800 (1 MP)	800x600	1280x800 (1 MP)	800x600	1280x800 (1 MP)	1280x800 (1 MP)
Frames per second	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (1280x800) 30 (HDTV 720p)
Audio support				Two-way Built-in mic and speaker	Two-way Built-in mic and speaker	Two-way Built-in mic and speaker
Alarm in-/outputs	1/1			1/1	1/1	1/1
Intelligent video	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm	Motion detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	DC PoE splitter available	DC PoE splitter available	DC PoE splitter available	DC PoE splitter available	DC PoE splitter available	DC PoE IEEE 802.3af Class 2
Outdoor use						
Other	Digital PTZ, IEEE 802.11b/g/n, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Built-in PIR sensor, illumination LED, digital PTZ, IEEE 802.11b/g/n, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Built-in PIR sensor, illumination LED, digital PTZ, IEEE 802.11b/g/n, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Built-in PIR sensor, illumination LED, digital PTZ, AVHS ⁽¹⁾ , ONVIF, Corridor Format
Axis Part #	0554-004	0519-004	0520-004	0521-004	0522-004	0338-004
MSRP	\$199	\$179	\$229	\$279	\$329	\$399

Notations (a) and (b) refer to the corresponding product models for the column; (1) AVHS - AXIS Video Hosting System with One-Click Camera Connection

Axis fixed network cameras

	AXIS M11 Series					
	AXIS M1103	AXIS M1104	AXIS M1113 ^(a) AXIS M1113-E ^(b)	AXIS M1114 ^(a) AXIS M1114-E ^(b)	AXIS M1144-L	AXIS M2014-E
						
Image sensor	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS
Lens	2.8 mm/F2.0 6 mm/F1.8 fixed iris, CS mount	2.8 mm/F2.0 6 mm/F1.8 fixed iris, CS mount	Varifocal 2.9 - 8.2 mm/F1.4 DC-iris, CS mount	Varifocal 2.8 - 8 mm/F1.2 DC-iris, CS mount	Varifocal 2.5-6 mm/F1.4 DC-iris	2.8 mm/F2.0 fixed iris, fixed focus
Horizontal angle of view	2.8 mm: 66° 6 mm: 31°	2.8 mm: 80° 6 mm: 37°	65° - 25°	77° - 29°	87° - 40°	81°
Day and night					Automatic	
Min illumination/ light sensitivity (lux)	2.8 mm: 1.0 - 100,000 6 mm: 0.9 - 100,000	2.8 mm: 1.0 - 100,000 6 mm: 0.9 - 100,000	0.6	0.6	0.6 (color) 0.08 (B/W) 0 (with IR illumination)	1.0 - 10000
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	800x600	1280x800 (1 MP) ⁽²⁾	800x600	1280x800 (1 MP) ⁽²⁾	1280x800 (1MP)	HDTV 720p 1280x720
Frames per second	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (1280x800), 30 (HDTV 720p)	25/30 (HDTV 720p, 50/60Hz)
Audio support						
Alarm in-/outputs					1/1	1/1
Intelligent video	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm	Motion detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class2	PoE IEEE 802.3af Class2
Outdoor use	Requires housing	Requires housing	Outdoor ready ^(b)	Outdoor ready ^(b)		Outdoor ready camera unit
Other	Digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format ^(a)	Digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format ^(a)	Digital PTZ, memory card slot, Built-in IR illumination, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Memory card slot, AVHS ⁽¹⁾ , ONVIF Corridor Format
Axis Part #	2.8mm: 0329-001 6mm: 0366-001	2.8mm: 0339-001 6mm: 0367-001	0340-001 ^(a) 0431-001 ^(b)	0341-001 ^(a) 0432-001 ^(b)	0436-001	0549-001
MSRP	2.8mm: \$349 6mm: \$349	2.8mm: \$449 6mm: \$449	\$449 ^(a) \$549 ^(b)	\$549 ^(a) \$649 ^(b)	\$449	\$399





Notations (a) and (b) refer to the corresponding product models for the column; (1) AVHS - AXIS Video Hosting System with One-Click Camera Connection; (2) 1440 x 900 (1.3 MP) scaled resolution available via VAPIX®; (3) Special firmware needed. Available for partners on Partner Pages

Axis fixed network cameras

	AXIS P13 Series				AXIS Q16 Series			AXIS Q17 Series	
	AXIS P1353^(a) AXIS P1353-E^(b)	AXIS P1354^(a) AXIS P1354-E^(b)	AXIS P1355^(a) AXIS P1355-E^(b)	AXIS P1357^(a) AXIS P1357-E^(b)	AXIS Q1602^(a) AXIS Q1602-E^(b)	AXIS Q1604^(a) AXIS Q1604-E^(b)	AXIS Q1614^(a) AXIS Q1614-E^(b)	AXIS Q1755^(a) AXIS Q1755-E^(b)	AXIS Q1765-LE
Image sensor	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/2.8" progressive scan CMOS	1/3.2" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/2.9" progressive scan RGB CMOS
Lens	Varifocal 3 - 8 mm/F1.0 DC-iris, CS mount Remote back focus	Varifocal 2.8 - 8 mm/F1.2 DC-iris, CS mount Remote back focus	Varifocal 2.8 - 8 mm mm/F1.6 P-Iris ⁽¹⁾ , CS mount Remote back focus	Varifocal 2.8 - 8 mm/F1.6 P-Iris ⁽¹⁾ , CS mount Remote back focus	Varifocal 2.8 - 8 mm/F1.2 DC-iris, CS-mount Remote back focus	Varifocal 2.8 - 8 mm/F1.2 P-Iris, CS-mount Remote back focus	Varifocal 2.8 - 8 mm/F1.2 P-Iris, CS-mount Remote back focus	5.1 - 51 mm/F1.8 auto iris and autofocus 10x optical zoom 12x digital zoom	4.7-84.6 mm/F1.6-2.8 auto iris and autofocus 18x optical zoom 12x digital zoom
Horizontal angle of view	82° - 34° ^(a) 80° - 34° ^(b)	100° - 34° ^(a) 80° - 34° ^(b)	109° - 39° ^(a) 80° - 39° ^(b)	92° - 32° ^(a) 80° - 32° ^(b)	100° - 34° ^(a) 80° - 34° ^(b)	100° - 34° ^(a) 80° - 34° ^(b)	100° - 34° ^(a) 80° - 34° ^(b)	48.1° - 5.1°	59° - 4°
Day and night	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/light sensitivity (lux)	0.1 (color) 0.02 (B/W)	0.1 (color) 0.02 (B/W)	0.2 (color) 0.04 (B/W)	0.2 (color) 0.04 (B/W)	0.05 (color) 0.008 (B/W)	0.1 (color), 0.02 (B/W) 0.4 (color), 0.06 (B/W)	D1: 0.05 (color), 0.008 (B/W) 720p 25/30 fps: 0.1 (color), 0.02 (B/W) WDR: 0.4 (color), 0.06 (B/W) 720p 50/60 fps: 0.2 (color), 0.04 (B/W)	2 (color) 0.2 (B/W)	0.5 (color) 0.04 (B/W)
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	800x600	1280x960 (1.3 MP) ⁽³⁾	1920x1080 (HDTV)	2592x1944 (5 MP)	768x576	1280x960 (1 MP) ⁽⁴⁾	1280x960 (1 MP) ⁽⁴⁾	HDTV 1080i 1920x1080 (2 MP)	HDTV 1080p 1920x1080 (2 MP)
Frames per second	30 (800x600)	30 (1280x960) 30 (HDTV 720p)	30 (HDTV 1080p)	30 (HDTV 1080p) 20 (3 MP) 12 (5 MP)	30 (768x576)	30 (1280x960) 30 (HDTV 720p)	30 (D1 & 1280x960) 60 (HDTV 720p)	30 (HDTV 1080i) 30 (HDTV 720p)	30 (HDTV 1080p)
Audio support	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)	Two-way ⁽⁵⁾
Alarm in-/outputs	1/1	1/1	1/1	1/1	1/1	1/1	1/1	2 configurable	2 configurable
Intelligent video	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm Gatekeeper AXIS Camera Application Platform	Motion detection, Audio detection, Tampering alarm, Gatekeeper, AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	DC ^(a) PoE IEEE 802.3af Class 2 ^(a) PoE Class 3/High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class 2 ^(a) PoE Class 3/High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class 3 ^(a,b) High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class 3 ^(a,b) High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class 3 ^(a,b) High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class ^(a,b) High PoE ^(b)	DC ^(a) PoE IEEE 802.3af Class 2 ^(a) , Class 3 ^(b)	AC/DC ^(a) PoE IEEE 802.3af Class 3 ^(a,b) High PoE ^(b)	AC/DC PoE IEEE 802.3af Class 3
Outdoor use	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready
Other	Arctic Temperature Control ^(b) , WDR, digital PTZ, pixel counter, memory card slot, IP66 and NEMA 4X ratings ^(b) , Lightfinder technology, AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR, digital PTZ, pixel counter, memory card slot, IP66 and NEMA 4X ratings ^(b) , Lightfinder technology, AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR, digital PTZ, pixel counter, multi-view streaming, memory card slot, IP66 and NEMA 4X ratings ^(b) , AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR, digital PTZ, pixel counter, multi-view streaming, memory card slot, IP66 and NEMA 4X ratings ^(b) , AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR, digital PTZ, pixel counter, memory card slot, Lightfinder technology, AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR-Dynamic capture, pixel counter, memory card slot, AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , WDR-Dynamic capture, auto rotation, leveling assistance, pixel counter, memory card slot, shock detection AVHS ⁽²⁾ , ONVIF, Corridor Format ^(a)	Arctic Temperature Control ^(b) , RS422/RS485, memory card slot, analog video out, pan/tilt head support, IP66 and NEMA 4X ratings ^(b) , ONVIF, Corridor Format ^(a)	Arctic Temperature Control, Built-in IR illumination, memory card slot, IP66 and NEMA 4X ratings, AVHS, ONVIF, Corridor Format
Axis Part #	0523-001 ^(a) 0527-001 ^(b)	0524-001 ^(a) 0528-001 ^(b)	0525-001 ^(a) 0529-001 ^(b)	0526-001 ^(a) 0530-001 ^(b)	0437-001 ^(a) 0438-001 ^(b)	0439-001 ^(a) 0463-001 ^(b)	0550-001 ^(a) 0551-001 ^(b)	0304-001 ^(a) 0348-001 ^(b)	0509-001
MSRP	\$699 ^(a) \$949 ^(b)	\$799 ^(a) \$1049 ^(b)	\$899 ^(a) \$1149 ^(b)	\$1049 ^(a) \$1299 ^(b)	\$899 ^(a) \$1199 ^(b)	\$999 ^(a) \$1299 ^(b)	\$1099 ^(a) \$1399 ^(b)	\$1499 ^(a) \$1799 ^(b)	\$1399








Notations (a) and (b) refer to the corresponding product models for the column; (1) AXIS P1355-E and AXIS P1357-E also support DC-iris lens; (2) AVHS - AXIS Video Hosting System with One-Click Camera Connection; (3) 1440x900 (1.3 MP) scaled resolution available via VAPIX®; (4) 1400x1050 (1.4 MP) scaled resolution available via VAPIX®; (5) With multi-connector cable - sold separately

Axis covert cameras








	AXIS P12 Series			
				
Image sensor	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS
Lens	3.7 mm/F1.8 fixed iris	3.7 mm/F2.5 fixed iris	3.7 mm/F2.5 fixed iris	2.8 mm/F2.0 fixed iris
Horizontal angle of view	57°	57°	57°	81°
Day and night				
Min illumination/light sensitivity (lux)	1	1.2 - 10,000	1.2 - 10,000	1.0 - 10,000
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	1280x800 (1 MP) ⁽³⁾	HDTV 720p 1280x720	HDTV 720p 1280x720	HDTV 720p 1280x720
Frames per second	30 (1280x800) 30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)
Audio support				
Alarm in-/outputs		1/1	1/1	1/1
Intelligent video	Motion detection Tampering alarm	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	PoE IEEE 802.3af Class 1	DC PoE IEEE 802.3af Class 2	DC PoE IEEE 802.3af Class 2	DC PoE IEEE 802.3af Class 2
Outdoor use				Outdoor ready sensor unit
Other	Eye-level covert camera, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF	Memory card slot, AVHS ⁽¹⁾ , ONVIF	Memory card slot, AVHS ⁽¹⁾ , ONVIF	IP66 rated sensor unit, memory card slot, AVHS ⁽¹⁾ , ONVIF
Axis Part #	0454-004 ^(a) 0455-004 ^(b) 0456-004 ^(c)	0531-001	0532-001	0533-001
MSRP	\$649 ^(a) , \$649 ^(b) , \$649 ^(c)	\$499	\$499	\$499

Axis fixed dome network cameras

5

AXIS M30 Series						
						
1/4" progressive scan CMOS	1/2.7" progressive scan CMOS	1/3.6" (effective) progressive scan CMOS	1/3.2" progressive scan CMOS	1/4" progressive scan RGB CMOS	1/2.7" progressive scan RGB CMOS	1/3.6" (effective) progressive scan RGB CMOS
2.8 mm/F2.8 fixed iris, M12 mount	2.8 mm/F2.8 fixed iris, M12 mount	1.6 mm/F2.8 fixed iris, M12 mount	1.3 mm/F2.8 fixed iris, M12 mount	2.8 mm/F2.0 fixed iris, M12 mount	3.6 mm/F2.0 fixed iris, M12 mount	2.0 mm, F2.0 fixed iris, M12 mount
80°	118°	134°	187°	77°	91°	106°
				Automatic	Automatic	Automatic
1.5 - 100,000	1.5 - 100,000	0.6 - 200,000	0.6 - 200,000	0.8 - 100,000 (color) 0.16 (B/W) 0 with LED on	0.8 - 100,000 (color) 0.16 (B/W)	0.3 - 200,000 (color) 0.06 (B/W)
H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
1280x800 (1 MP)	HDTV 1080p 1920x1080 (2 MP)	2048x1536 (3 MP)	2592x1944 (5 MP)	1280x800 (1 MP)	HDTV 1080p 1920x1080 (2 MP)	2048x1536 (3 MP)
30 (1280x800) 30 (HDTV 720p)	30 (HDTV 1080p)	20 (2048x1536) 30 (HDTV 1080p) 30 (1600x1200)	12 (2592x1944)	30 (1280x800)	30 (HDTV 1080p)	20 (2048x1536) 30 (HDTV 1080p) 30 (1600x1200)
				1/1	1/1	1/1
Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2
				Outdoor ready	Outdoor ready	Outdoor ready
Vandal resistant, IP42 rating, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP42 rating, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP42 rating, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	360°/180° panoramic views, vandal resistant ^(b) , IP42 rating ^(b) , discreet design with uncovered lens ^(b) , WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾	Vandal resistant, IP66 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, memory card slot, built-in IR, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format
0516-001	0517-001	0514-001	0543-001 ^(a) 0515-001 ^(b)	0535-001	0536-001	0547-001
\$279	\$379	\$499	\$599 ^(a) , \$649 ^(b)	\$549	\$549	\$649

Axis fixed dome network cameras

	AXIS M31-R Series			AXIS M31-VE Series		AXIS M32 Series	
	AXIS M3014	AXIS M3113-R	AXIS M3114-R	AXIS M3113-VE	AXIS M3114-VE	AXIS M3203 ^(a) AXIS M3203-V ^(b)	AXIS M3204 ^(a) AXIS M3204-V ^(b)
							
Image sensor	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS
Lens	2.8 mm/F2.0 fixed iris	2.9 mm/F2.0 fixed iris	Fixed iris Standard: 2.9 mm/F2.0 2 mm: 1.97 mm/F3.0	2.9 mm/F2.0 fixed iris	Fixed iris Standard: 2.9 mm/F2.0 2 mm: 1.97 mm/F3.0	Varifocal 2.8 - 10 mm/F1.7 fixed iris	Varifocal 2.8 - 10 mm/F1.7 fixed iris
Horizontal angle of view	80°	66°	Standard: 80° 2 mm: 105°	66°	Standard: 80° 2 mm: 105°	66° - 18°	80° - 22°
Day and night							
Min illumination/light sensitivity (lux)	1 - 100,000	1 - 100,000	1 - 100,000	1 - 100,000	1 - 100,000	0.9 - 100,000	0.9 - 100,000
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	1280x800 (1 MP)	800x600	1280x800 (1 MP) ⁽²⁾	800x600	1280x800 (1 MP) ⁽²⁾	800x600	1280x800 (1 MP) ⁽²⁾
Frames per second	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (1280x800) 30 (HDTV 720p)
Audio support							
Alarm in-/outputs							
Intelligent video	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 2	PoE IEEE 802.3af Class 2
Outdoor use				Outdoor ready	Outdoor ready		
Other	Recessed mounting, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF	Rugged connectors for mobile surveillance, IP66, IP67 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Rugged connectors for mobile surveillance, IP66, IP67 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66, IP67 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66, IP67 and NEMA 4X ratings, WDR, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Tamper resistant ^(a) , vandal resistant ^(b) , digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Tamper resistant ^(a) , vandal resistant ^(b) , digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format
Axis Part #	0285-001	0330-001	0342-001	0412-001	0413-001	0336-001 ^(a) 0345-001 ^(b)	0337-001 ^(a) 0346-001 ^(b)
MSRP	\$349	\$449	\$549	\$449	\$549	\$399 ^(a) , \$439 ^(b)	\$499 ^(a) , \$539 ^(b)

Axis fixed dome network cameras

AXIS P33 Series										
	AXIS P3301 ^(a) AXIS P3301-V ^(b)	AXIS P3304 ^(a) AXIS P3304-V ^(b)	AXIS P3353	AXIS P3363-V ^(a) AXIS P3363-VE ^(b)	AXIS P3354	AXIS P3364-V ^(a) /-LV ^(c) AXIS P3364-VE ^(a) /-LVE ^(d)	AXIS P3384-V ^(a) AXIS P3384-VE ^(b)	AXIS P3346	AXIS P3346-V ^(a) AXIS P3346-VE ^(b)	AXIS P3367-V ^(a) AXIS P3367-VE ^(b)
Image sensor	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" (effective) progressive scan CMOS	1/3" (effective) progressive scan CMOS	1/3.2" progressive scan CMOS
Lens	Varifocal 2.8 - 10 mm/F1.3 DC-iris	Varifocal 2.8 - 10 mm/F1.7 DC-iris	Varifocal, remote focus and zoom, IR corrected, P-Iris 6 mm: 2.5-6 mm /F1.2 12 mm: 3.3-12 mm/F1.4	Varifocal, remote focus and zoom, IR corrected, P-Iris 6 mm: 2.5-6 mm /F1.2 12 mm: 3.3-12 mm/F1.4	Varifocal, remote focus and zoom, IR corrected, P-Iris 6 mm: 2.5-6 mm /F1.2 12 mm: 3.3-12 mm/F1.4	Varifocal, remote focus and zoom, IR corrected, P-Iris 6 mm: 2.5-6 mm /F1.2 12 mm: 3.3-12 mm/F1.4	Varifocal, remote focus and zoom, IR corrected, P-Iris 3-9 mm/F1.2	Varifocal, remote focus and zoom, IR corrected, P-Iris 3-9 mm/F1.2	Varifocal, remote focus and zoom, IR corrected, P-Iris 3-9 mm/F1.2	Varifocal, remote focus and zoom, IR corrected, P-Iris 3-9 mm/F1.2
Horizontal angle of view	72° - 23°	80° - 22°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	6 mm: 105° - 49° 12 mm: 82° - 24°	84° - 30°	84° - 30°	84° - 30°	84° - 30°
Day and night			Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/light sensitivity (lux)	1	0.9	6mm: 0.1 (color), 0.02 (B/W) 12mm: 0.15 (color), 0.03 (B/W)	6mm: 0.1 (color), 0.02 (B/W) 12mm: 0.15 (color), 0.03 (B/W)	6mm: 0.1 (color), 0.02 (B/W) 12mm: 0.15 (color), 0.03 (B/W)	6mm: 0.1 (color), 0.02 (B/W) ^(a,b) 6mm: 0.12 (color), 0.03 (B/W) ^(c,d) 12mm: 0.15 (color), 0.03 (B/W) ^(a,b) 12mm: 0.18 (color), 0.04 (B/W) ^(c,d) 0 (with IR illumination) ^(c,d)	With dynamic capture: 0.5 (color), 0.08 (B/W) With Lightfinder: 0.15 (color), 0.03 (B/W)	0.5 (color), 0.08 (B/W)	0.5 (color), 0.08 (B/W)	0.2 (color) 0.04 (B/W)
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	640x480	1280x800 (1 MP) ⁽²⁾	800x600	800x600	1280x960 (approx. 1.3 MP) ⁽³⁾	1280x960 (approx. 1.3 MP) ⁽³⁾	1280x960 (approx. 1.3 MP) ⁽³⁾	2048x1536 (3 MP)	2048x1536 (3 MP)	2592x1944 (5 MP)
Frames per second	30 (640x480)	30 (1280x800) 30 (HDTV 720p)	30 (800x600)	30 (800x600)	30 (1280x960) 30 (HDTV 720p)	30 (1280x960) 30 (HDTV 720p)	30 (1280x960) 30 (HDTV 720p)	20 (2048x1536) 30 (HDTV 1080p) 30 (1600x1200)	20 (2048x1536) 30 (HDTV 1080p) 30 (1600x1200)	12 (2592x1944) 20 (2048x1536) 30 (HDTV 1080p) 30 (1600x1200)
Audio support	Two-way, built-in mic	Two-way, built-in mic		Two-way Built-in mic ^(a)		Two-way Built-in mic ^(a,d)	Two-way Built-in mic ^(a)	Two-way Built-in mic	Two-way Built-in mic ^(a)	Two-way Built-in mic ^(a)
Alarm in-/outputs	1/1	1/1		1/1		1/1	1/1	1/1	1/1	1/1
Intelligent video	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	DC PoE IEEE 802.3af Class 2	DC PoE IEEE 802.3af Class 2	PoE IEEE 802.3af/802.3at Class 2	PoE IEEE 802.3af/802.3at Class 2 ^(a) , Class 3 ^(b)	PoE IEEE 802.3af/802.3at Class 2	PoE IEEE 802.3af/802.3at Class 2 ^(a) , Class 3 ^(b,c,d)	PoE IEEE 802.3af /802.3at Class 2 ^(a) , Class 3 ^(b)	PoE IEEE 802.3af /802.3at Class 2	PoE IEEE 802.3af /802.3at Class 2 ^(a) , Class 3 ^(b)	PoE IEEE 802.3af /802.3at Class 2 ^(a) , Class 3 ^(b)
Outdoor use				Outdoor ready ^(b)		Outdoor ready ^(b,d)	Outdoor ready ^(b)		Outdoor ready ^(b)	Outdoor ready ^(b)
Other	Tamper resistant ^(a) , vandal resistant ^(b) , WDR, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format (3:4 only)	Tamper resistant ^(a) , vandal resistant ^(b) , WDR, digital PTZ, pixel counter, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Tamper resistant, WDR, digital PTZ, memory card slot, Lightfinder technology AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings ^(b) , WDR, digital PTZ, pixel counter, memory card slot, Lightfinder technology AVHS ⁽¹⁾ , ONVIF, Corridor Format	Tamper resistant, WDR, digital PTZ, pixel counter, memory card slot, Lightfinder technology AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings ^(b,d) , WDR, digital PTZ, pixel counter, memory card slot, Lightfinder technology, Built-in adjustable IR (100 ft range) ^(c,d) , AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings ^(b) , WDR-Dynamic capture, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Tamper resistant, WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings ^(b) , WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format	Vandal resistant, IP66 and NEMA 4X ratings ^(b) , WDR, digital PTZ, pixel counter, memory card slot, AVHS ⁽¹⁾ , ONVIF, Corridor Format
Axis Part #	0290-001 ^(a) 0292-001 ^(b)	0352-001 ^(a) 0353-001 ^(b)	6mm: 0464-001 12mm: 0466-001	6mm: 0508-001 ^(a) , 0468-001 ^(b) 12mm: 0470-001 ^(a) , 0483-001 ^(b)	6mm: 0465-001 12mm: 0467-001	6mm: 0481-001 ^(a) , 0482-001 ^(b) 6mm: 0485-001 ^(c) , 0476-001 ^(d) 12mm: 0471-001 ^(a) , 0484-001 ^(b) 12mm: 0486-001 ^(c) , 0473-001 ^(d)	0511-001 ^(a) 0512-001 ^(b)	0369-001	0370-001 ^(a) 0371-001 ^(b)	0406-001 ^(a) 0407-001 ^(b)
MSRP	\$499 ^(a) , \$539 ^(b)	\$599 ^(a) , \$639 ^(b)	6 mm: \$599 12 mm: \$599	6mm: \$699 ^(a) , \$859 ^(b) 12mm: \$699 ^(a) , \$859 ^(b)	6mm: \$599 12mm: \$599	6mm: \$699 ^(a) , \$899 ^(b) 6mm: \$799 ^(c) , \$999 ^(d) 12mm: \$699 ^(a) , \$899 ^(b) 12mm: \$799 ^(c) , \$999 ^(d)	\$899 ^(a) \$1099 ^(b)	\$959	\$999 ^(a) \$1159 ^(b)	\$999 ^(a) \$1199 ^(b)

Notations (a) and (b) refer to the corresponding product models for the column; (1) AVHS - AXIS Video Hosting System with One-Click Camera Connection; (2) 1440 x 900 (1.3 MP) scaled resolution available via VAPIX®; (3) *1400x1050 (1.4 MP) scaled resolution available via VAPIX®

Axis pan/tilt/zoom network cameras




	AXIS M50 Series			AXIS P54 Series			AXIS P55 Series				
	AXIS 212 PTZ ^(a) AXIS 212 PTZ-V ^(b)	AXIS M5013 ^(a) AXIS M5013-V ^(b)	AXIS M5014 ^(a) AXIS M5014-V ^(b)	AXIS 214 PTZ	AXIS P5414-E	AXIS P5415-E	AXIS P5512 ^(a) AXIS P5512-E ^(b)	AXIS P5522 ^(a) AXIS P5522-E ^(b)	AXIS P5532 ^(a) AXIS P5532-E ^(b)	AXIS P5534 ^(a) AXIS P5534-E ^(b)	AXIS P5544
Image sensor	1/2" progressive scan CMOS	1/4" progressive scan CMOS	1/4" progressive scan CMOS	1/4" ExView HAD CCD	1/2.8" progressive scan RGB CMOS	1/2.8" progressive scan RGB CMOS	1/4" CCD	1/4" ExViewHAD progressive scan CCD	1/4" ExViewHAD progressive scan CCD	1/3" progressive scan CCD	1/3" progressive scan CCD
Lens	2.7 mm/F1.8 fixed iris 3x instant zoom	3.6 mm/F1.8 3x digital zoom	3.6 mm/F1.8 3x digital zoom	4.1 - 73.8 mm/F1.3 auto iris and autofocus 18x optical zoom 12x digital zoom	4.7 - 84.6 mm, F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	4.7 - 84.6 mm, F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	3.8 - 46 mm/F1.6 - 2.7 auto iris and autofocus 12x optical zoom 4x digital zoom	4.1 - 73.8 mm/F1.4 - 3.0 auto iris and autofocus 18x optical zoom 12x digital zoom	3.6 - 104.4 mm/F1.43 - 3.67 auto iris and autofocus 29x optical zoom 12x digital zoom	4.7 - 84.6 mm/F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom	Zoom lens: 4.7-84.6 mm/ F1.6 - 2.8 auto iris and autofocus 18x optical zoom 12x digital zoom Panopsis lens: 2.7 mm
Horizontal angle of view	140° - 44°	45°	60°	48° - 2.7°	59° - 4°	59° - 4°	51.6° - 4.4°	47.0° - 2.8°	53.1° - 2.0°	55.2° - 3.2°	Zoom lens: 55.2° - 3.2° Panopsis lens: 180°
Day and night				Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/light sensitivity (lux)	10 lux wide mode 20 lux tele mode	1.4 (color)	1.4 (color)	0.3 (color) 0.005 (B/W)	0.4 (color) 0.04 (B/W)	0.5 (color) 0.04 (B/W)	1 (color) 0.1 (B/W)	0.5 (color) 0.01 (B/W)	0.5 (color) 0.01 (B/W)	0.74 (color) 0.04 (B/W)	0.74 (color) 0.04 (B/W)
Video compression	Motion JPEG, MPEG-4	H.264, Motion JPEG	H.264, Motion JPEG	Motion JPEG, MPEG-4	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG
Max video resolution (pixels)	640x480	SVGA 800x600	HDTV 720p 1280x720	4CIF: 704x576 (50 Hz), 704x480 (60 Hz)	HDTV 720p 1280x720	HDTV 1080p 1920x1080	4CIF: 704x576 (50 Hz), 704x480 (60 Hz)	D1: 720x576 (50 Hz), 720x480 (60 Hz)	D1: 720x576 (50 Hz), 720x480 (60 Hz)	HDTV 720p 1280x720	HDTV 720p 1280x720
Frames per second	30 (640x480) at max. zoom	30	30	30 (4CIF)	30 (HDTV 720p)	30 (HDTV 1080p)	30 (4CIF)	30 (D1)	30 (D1)	30 (HDTV 720p)	30 (HDTV 720p)
Pan/Tilt/Zoom	20 presets 140° pan 105° tilt Guard tour	25 presets ±180° pan 90° tilt	25 presets ±180° pan 90° tilt	20 presets 340° pan 120° tilt	100 presets ± 135° pan 0° - 90° tilt Limited guard tour	100 presets ± 135° pan 0° - 90° tilt Limited guard tour	100 presets 360° pan via Auto-flip 180° tilt Limited guard tour	100 presets 360° pan via Auto-flip 180° tilt Limited guard tour	100 presets 360° pan via Auto-flip 180° tilt Limited guard tour	100 presets 360° pan via Auto-flip 180° tilt Limited guard tour	100 presets 360° pan via Auto-flip 180° tilt Limited guard tour
Audio support	Two-way, built-in mic	One-way, built-in mic ^(a)	One-way, built-in mic ^(a)	Two-way	Two-way	Two-way	Two-way ^(a,1)	Two-way ^(a,1)	Two-way ^(a,1)	Two-way ^(a,1)	Two-way ⁽¹⁾
Alarm in-/outputs	1/1			1/1	4 configurable inputs/outputs	4 configurable inputs/outputs	4 configurable inputs/outputs ^(a,1)	4 configurable inputs/outputs ^(a,1)	4 configurable inputs/outputs ^(a,1)	4 configurable inputs/outputs ^(a,1)	4 configurable inputs/outputs ⁽¹⁾
Intelligent video	Motion detection Audio detection	Motion detection Audio detection ^(a) AXIS Camera Application Platform	Motion detection Audio detection ^(a) AXIS Camera Application Platform	Motion detection Audio detection	Motion detection Audio detection Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection ^(a,1) Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection ^(a,1) Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection ^(a,1) Advanced Gatekeeper AXIS Camera Application Platform	Motion detection Audio detection ^(a,1) Advanced Gatekeeper AXIS Camera Application Platform ^(a)	Motion detection Audio detection ^(a) Advanced Gatekeeper AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	DC PoE IEEE 802.3af Class 1	PoE IEEE 802.3af Class 3	PoE IEEE 802.3af Class 3	DC	PoE+ IEEE 802.3at Class 4 24 V DC	PoE+ IEEE 802.3at Class 4 24 V DC	AC/DC ^(a,1) PoE+ IEEE 802.3af Class 3	AC/DC ^(a,1) PoE+ IEEE 802.3at (Midspan supplied)	AC/DC ^(a,1) PoE+ IEEE 802.3at (Midspan supplied)	AC/DC ^(a,1) PoE+ IEEE 802.3at (Midspan supplied)	AC/DC ^(a,1) PoE+ IEEE 802.3at (Midspan supplied)
Outdoor use				Requires housing	Outdoor ready	Outdoor ready	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	Outdoor ready ^(b)	
Other	Continuous motion 24/7, vandal-resistant ^(b) , AVHS ⁽²⁾ , ONVIF	IP51 rating ^(a) , IP66 and IK10 ratings ^(a) , pixel counter, memory card slot, AVHS ⁽²⁾ , ONVIF	IP51 rating ^(a) , IP66 and IK10 ratings ^(a) , pixel counter, memory card slot, AVHS ⁽²⁾ , ONVIF	AVHS ⁽²⁾	For wall-mount installations only, built-in wall bracket, repaintable integrated sunshield, direct drive pan/tilt system, pixel counter, memory card slot, IP66 and NEMA 4X ratings, AVHS ⁽²⁾ , ONVIF	For wall-mount installations only, built-in wall bracket, repaintable integrated sunshield, direct drive pan/tilt system, pixel counter, memory card slot, IP66 and NEMA 4X ratings, AVHS ⁽²⁾ , ONVIF	Pixel counter, memory card slot, IP51 rating ^(a) , IP66 and NEMA 4X ratings ^(a) , AVHS ⁽²⁾ , ONVIF	Pixel counter, memory card slot, IP51 rating ^(a) , IP66 and NEMA 4X ratings ^(a) , WDR, AVHS ⁽²⁾ , ONVIF	Pixel counter, memory card slot, IP51 rating ^(a) , IP66 and NEMA 4X ratings ^(a) , image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF ^(b)	Pixel counter, memory card slot, IP51 rating ^(a) , IP66 and NEMA 4X ratings ^(a) , WDR, AVHS ⁽²⁾ , ONVIF	360° panoramic view, pixel counter, memory card slot, IP51 rating, WDR, AVHS ⁽²⁾ , ONVIF
Axis Part #	0257-004 ^(a) 0280-004 ^(b)	0398-001 ^(a) 0552-001 ^(b)	0399-001 ^(a) 0553-001 ^(b)	0246-004	0588-001	0589-001	0409-001 ^(a) 0411-001 ^(b)	0420-004 ^(a) 0422-004 ^(b)	0310-004 ^(a) 0312-004 ^(b)	0314-004 ^(a) 0316-004 ^(b)	0443-004
MSRP	\$649 ^(a) , \$699 ^(b)	\$499 ^(a) , \$599 ^(b)	\$599 ^(a) , \$699 ^(b)	\$1299	\$1599	\$1999	\$1099 ^(a) , \$1499 ^(b)	\$1499 ^(a) , \$1899 ^(b)	\$1999 ^(a) , \$2399 ^(b)	\$2499 ^(a) , \$2899 ^(b)	\$2999

Notations (a) and (b) refer to the corresponding product models for the column; (1) With multi-connector cable - sold separately; (2) AVHS - AXIS Video Hosting System with One-Click Camera Connection; (3) Special firmware needed. Available for partners on Partner Pages








Axis pan/tilt/zoom network cameras

AXIS Q60 Series									
	AXIS Q6042 ^(a) AXIS Q6042-E ^(b)	AXIS Q6042-C	AXIS Q6042-S	AXIS Q6044 ^(a) AXIS Q6044-E ^(b)	AXIS Q6044-C	AXIS Q6044-S	AXIS Q6045 ^(a) AXIS Q6045-E ^(b)	AXIS Q6045-C	AXIS Q6045-S
Image sensor	1/4" ExView HAD progressive scan CCD	1/4" ExView HAD progressive scan CCD	1/4" ExView HAD progressive scan CCD	1/3" progressive scan CCD	1/3" progressive scan CCD	1/3" progressive scan CCD	1/3" progressive scan CMOS	1/3" progressive scan CMOS	1/3" progressive scan CMOS
Lens	3.3 – 119 mm, F1.4 – 4.2 auto iris and autofocus 36x optical zoom 12x digital zoom	3.3 – 119 mm, F1.4 – 4.2 auto iris and autofocus 36x optical zoom 12x digital zoom	3.3 – 119 mm, F1.4 – 4.2 auto iris and autofocus 36x optical zoom 12x digital zoom	4.4 – 132 mm, F1.4 – 4.6 auto iris and autofocus 30x optical zoom 12x digital zoom	4.4 – 132 mm, F1.4 – 4.6 auto iris and autofocus 30x optical zoom 12x digital zoom	4.4 – 132 mm, F1.4 – 4.6 auto iris and autofocus 30x optical zoom 12x digital zoom	4.45 – 89 mm, F1.6 – 2.9 auto iris and autofocus 20x optical zoom 12x digital zoom	4.45 – 89 mm, F1.6 – 2.9 auto iris and autofocus 20x optical zoom 12x digital zoom	4.45 – 89 mm, F1.6 – 2.9 auto iris and autofocus 20x optical zoom 12x digital zoom
Horizontal angle of view	57.2° – 1.7°	57.2° – 1.7°	57.2° – 1.7°	62.9° – 2.2°	62.9° – 2.2°	62.9° – 2.2°	62.98° – 3.49°	62.98° – 3.49°	62.98° – 3.49°
Day and night	Automatic	Automatic	Azumatic	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Min illumination/light sensitivity (lux)	0.5 (color) 0.008 (B/W)	0.5 (color) 0.008 (B/W)	0.5 (color) 0.008 (B/W)	0.2 (color) 0.04 (B/W)	0.2 (color) 0.04 (B/W)	0.2 (color) 0.04 (B/W)	0.6 (color) 0.04 (B/W)	0.6 (color) 0.04 (B/W)	0.6 (color) 0.04 (B/W)
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	Extended D1: 736x576 (50 Hz) 752x480 (60 Hz)	Extended D1: 736x576 (50 Hz) 752x480 (60 Hz)	Extended D1: 736x576 (50 Hz) 752x480 (60 Hz)	HDTV 720p 1280x720	HDTV 720p 1280x720	HDTV 720p 1280x720	HDTV 1080p 1920x1080	HDTV 1080p 1920x1080	HDTV 1080p 1920x1080
Frames per second	30 (Extended D1)	30 (Extended D1)	30 (Extended D1)	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 720p)	30 (HDTV 1080p)	30 (HDTV 1080p)	30 (HDTV 1080p)
Pan/Tilt/Zoom	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording	256 presets, 360° endless 180° tilt ^(a) , 220° tilt ^(b) Guard tour, Tour recording
Audio support	Two-way ^(a,1)			Two-way ^(a,1)			Two-way ^(a,1)		
Alarm in-/outputs	4 configurable inputs/outputs ^(a,1)	2 configurable inputs/outputs	2 configurable inputs/outputs	4 configurable inputs/outputs ^(a,1)	2 configurable inputs/outputs	2 configurable inputs/outputs	4 configurable inputs/outputs ^(a,1)	2 configurable inputs/outputs	2 configurable inputs/outputs
Intelligent video	Motion detection Autotracking Active Gatekeeper AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Automatic defog AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Automatic defog AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Automatic defog AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Highlight compensation Object removed, Enter/exit detection, Fence detector, Object counter AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Highlight compensation Object removed, Enter/exit detection, Fence detector, Object counter AXIS Camera Application Platform	Motion detection Autotracking Active Gatekeeper Highlight compensation Object removed, Enter/exit detection, Fence detector, Object counter AXIS Camera Application Platform
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	AC/DC ^(a,1) PoE+ IEEE 802.3at ^(a) High PoE ^(b) (Midspan supplied)	12 V DC	12 V DC	AC/DC ^(a,1) PoE+ IEEE 802.3at ^(a) High PoE ^(b) (Midspan supplied)	12 V DC	12 V DC	AC/DC ^(a,1) PoE+ IEEE 802.3at ^(a) High PoE ^(b) (Midspan supplied)	12 V DC	12 V DC
Outdoor use	Outdoor ready ^(b)	Outdoor ready with active cooling for operation in temperatures up to 75°C/167°F	Outdoor ready	Outdoor ready ^(b)	Outdoor ready with active cooling for operation in temperatures up to 75°C/167°F	Outdoor ready	Outdoor ready ^(b)	Outdoor ready with active cooling for operation in temperatures up to 75°C/167°F	Outdoor ready
Other	Continuous motion 24/7, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF, Arctic Temperature Control ^(a)	Continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP66 and NEMA 4X ratings, MIL-STD-810G, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF	Pressurized, stainless steel casing, continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP66 and NEMA 4X ratings, MIL-STD-810G, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF	Continuous motion 24/7, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF, Arctic Temperature Control ^(a)	Continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, MIL-STD-810G, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF	Pressurized, stainless steel casing, continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, MIL-STD-810G, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF	Continuous motion 24/7, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, WDR, AVHS ⁽²⁾ , ONVIF, Arctic Temperature Control ^(a)	Continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP52 rating ^(a) , vandal resistant ^(b) , IP66 and NEMA 4X ratings, WDR, AVHS ⁽²⁾ , ONVIF	Pressurized, stainless steel casing, continuous motion 24/7, 2xSFP slots for fiber, 2xRJ45 connectors, pixel counter, memory card slot, IP66 and NEMA 4X ratings, MIL-STD-810G, image stabilizer, WDR, AVHS ⁽²⁾ , ONVIF
Axis Part #	0558-004 ^(a) 0560-004 ^(b)	0562-001	0579-001	0570-004 ^(a) 0572-004 ^(b)	0574-001	0581-001	0564-004 ^(a) 0566-004 ^(b)	0568-001	0583-001
MSRP	\$2499 ^(a) \$2999 ^(b)	\$3499	\$5499	\$2849 ^(a) \$3399 ^(b)	\$3899	\$5799	\$3049 ^(a) \$3599 ^(b)	\$4099	\$5999










Axis ptz network cameras

	AXIS Q87 Series	
	AXIS Q8721-E	AXIS Q8722-E
		
Image sensor	Visual camera: 1/3" progressive scan CMOS, Thermal camera: Uncooled micro bolometer 384x288 pixels	Visual camera: 1/3" progressive scan CMOS, Thermal camera: Uncooled micro bolometer 640x480 pixels
Lens	Visual camera: 5.1 - 51 mm/F1.8, auto iris and autofocus Thermal camera: 35 mm/F1.2 or 60 mm/F1.2	Visual camera: 5.1 - 51 mm/F1.8, auto iris and autofocus Thermal camera: 35 mm/F1.2 or 60 mm/F1.2
Horizontal angle of view	Visual camera: 48.1° - 5.1° Thermal camera: 35 mm: 16° or 60 mm: 9°	Visual camera: 48.1° - 5.1° Thermal camera: 35 mm: 18° or 60 mm: 10°
Day and night	Visual camera: Automatic	Visual camera: Automatic
Detection range (m/yd.)	35 mm: 700/766 ^(a) , 2200/2405 ^(b) 60 mm: 1200/1312 ^(a) , 3700/4046 ^(b)	35 mm: 1050/1148 ^(a) , 3200/3500 ^(b) 60 mm: 1800/1970 ^(a) , 5500/6015 ^(b)
Sensitivity	NETD < 100 mK	NETD < 100 mK
Min illumination/light sensitivity (lux)	Visual camera: 2 (color), 0.2 (B/W)	Visual camera: 2 (color), 0.2 (B/W)
Video compression	H.264, Motion JPEG	H.264, Motion JPEG
Max video resolution (pixels)	Visual camera: HDTV 1080i 1920x1080 (2 MP) Thermal camera: 384x288	Visual camera: HDTV 1080i 1920x1080 (2 MP) Thermal camera: 640x480
Frames per second	Visual camera: 30 (HDTV 1080i) 30 (HDTV 720p) Thermal camera: 8.3/30 ^(d)	Visual camera: 30 (HDTV 1080i) 30 (HDTV 720p) Thermal camera: 8.3/30 ^(d)
Pan/Tilt/Zoom	32 presets, 360° endless pan, -45° to +20° tilt	32 presets, 360° endless pan, -45° to +20° tilt
Audio support		
Alarm in-/outputs		
Intelligent video	Motion detection Tampering alarm Active Gatekeeper AXIS Camera Application Platform	Motion detection Tampering alarm Active Gatekeeper AXIS Camera Application Platform
Security	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS
Power	24 V AC 50/60 Hz, 200 W, 230/120 V AC 50/60 Hz Requires AXIS Q87-E Power Supply	24 V AC 50/60 Hz, 200 W, 230/120 V AC 50/60 Hz Requires AXIS Q87-E Power Supply
Outdoor use	Outdoor ready	Outdoor ready
Other	IP66	IP66
Axis Part #	35mm: 0489-001 60mm: 0491-001	35mm: 0493-001 60mm: 0495-001
MSRP	35mm: \$18729 60mm: \$20929	35mm: \$23229 60mm: \$25429





Axis thermal network cameras

	AXIS Q19 Series					
	AXIS Q1910 AXIS Q1910-E	AXIS Q1921	AXIS Q1921-E	AXIS Q1922	AXIS Q1922-E	AXIS Q1931-E
						
Image sensor	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer	Uncooled Micro bolometer
Lens	13 mm/F1.25	10 mm/F1.2 19 mm/F1.0	10 mm/F1.2, 19 mm/F1.0 35 mm/F1.2, 60 mm/F1.2	10 mm/F1.2 19 mm/F1.0	10 mm/F1.2, 19 mm/F1.0 35 mm/F1.2, 60 mm/F1.2	7 mm/F1.2, 13 mm/F1.0 35 mm/F1.2, 60 mm/F1.25
Horizontal angle of view	17°	10 mm: 51° 19 mm: 28°	10 mm: 51° 19 mm: 28° 35 mm: 16° 60 mm: 9°	10 mm: 57° 19 mm: 32°	10 mm: 57° 19 mm: 32° 35 mm: 18° 60 mm: 10°	7 mm: 50° 13 mm: 28° 35 mm: 10° 60 mm: 6°
Day and night						
Detection range (m/yd.)	200/220 ^(a) 550/600 ^(b)	10 mm: 200/220 ^(a) 460/515 ^(b) 19 mm: 380/415 ^(a) 870/950 ^(b)	10 mm: 200/220 ^(a) 460/515 ^(b) 19 mm: 380/415 ^(a) 870/950 ^(b) 35 mm: 700/766 ^(a) 2200/2405 ^(b) 60 mm: 1200/1312 ^(a) 3700/4046 ^(b)	10 mm: 200/220 ^(a) 460/515 ^(b) 19 mm: 380/415 ^(a) 870/950 ^(b)	10 mm: 320/350 ^(a) 990/1083 ^(b) 19 mm: 580/634 ^(a) 1800/1969 ^(b) 35 mm: 1050/1148 ^(a) 3200/3500 ^(b) 60 mm: 1800/1970 ^(a) 5500/6015 ^(b)	7 mm: 220/240 ^(a) 675/740 ^(b) 13 mm: 390/430 ^(a) 1200/1300 ^(b) 35 mm: 1030/1130 ^(a) 3170/3460 ^(b) 60 mm: 1770/1930 ^(a) 5420/5920 ^(b)
Sensitivity	NETD < 100 mK	NETD < 100 mK	NETD < 100 mK	NETD < 100 mK	NETD < 100 mK	NETD < 70 mK
Min illumination/light sensitivity (lux)						
Video compression	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG	H.264, Motion JPEG
Max video resolution (pixels)	160x128	384x288	384x288	640x480	640x480	384x288
Frames per second	8.3	8.3/30 ⁽¹⁾	8.3/30 ⁽¹⁾	8.3/30 ⁽¹⁾	8.3/30 ⁽¹⁾	8.3/30 ⁽¹⁾
Pan/Tilt/Zoom						
Audio support	Two-way, Built-in mic ^(d)	Two-way, Built-in mic	Two-way	Two-way, Built-in mic	Two-way	Two-way
Alarm in-/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs	2 configurable inputs/outputs
Intelligent video	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Cross line detection Tampering alarm AXIS Camera Application Platform
Security	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3	AC/DC PoE IEEE 802.3af Class 3
Outdoor use	Outdoor ready ^(d)	Requires housing designed for thermal cameras,	Outdoor ready	Requires housing designed for thermal cameras	Outdoor ready	Outdoor ready
Other	RS-422/RS-485, memory card slot, palette setting, AVHS ⁽²⁾ , ONVIF	RS-422/RS-485, memory card slot, palette setting, AVHS ⁽²⁾ , ONVIF	RS-422/RS-485, memory card slot, IP66 rating, palette setting, AVHS ⁽²⁾ , ONVIF	RS-422/RS-485, memory card slot, palette setting, AVHS ⁽²⁾ , ONVIF	RS-422/RS-485, memory card slot, IP66 rating, palette setting, AVHS ⁽²⁾ , ONVIF	RS-422/RS-485, memory card slot, IP66 rating, palette setting, AVHS ⁽²⁾ , ONVIF
Axis Part #	0334-001 ^(c) 0335-001 ^(c)	10mm: 0388-001 19mm: 0384-001	10mm: 0389-001 19mm: 0385-001 35mm: 0390-001 60mm: 0391-001	10mm: 0506-001 19mm: 0502-001	10mm: 0507-001 19mm: 0503-001 35mm: 0477-007 60mm: 0478-001	7mm: 0600-001 13mm: 0601-001 35mm: 0602-001 60mm: 0603-001
MSRP	\$2999 ^(c) , \$3499 ^(d)	10mm: \$3999 19mm: \$3999	10mm: \$4499, 19mm: \$54499 35mm: \$5399, 60mm: \$7599	10mm: \$6999 19mm: \$6999	10mm: \$7499, 19mm: \$57499 35mm: \$8399, 60mm: \$10599	7mm: \$3499, 13mm: \$3499 35mm: \$4199, 60mm: \$6199

Axis video encoders



	1-channel video encoders			4-channel video encoders					
	AXIS M7001	AXIS Q7401	AXIS Q7411	AXIS M7014	AXIS P7214	AXIS P7224	AXIS Q7404	AXIS Q7414	AXIS Q7424-R
									
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264, Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC), 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)
Frames per second H.264 (NTSC) in maximum resolution	30 (D1)	30 (D1)	60 (D1)	15 (D1)	30 (D1)	30 (D1)	30 (D1)	30 (D1)	30 (D1)
Frames per second Motion JPEG (NTSC) in maximum resolution	30 (D1)	30 (D1)	60 (D1)	15 (D1)	30 (D1)	30 (D1)	30 (D1)	30 (D1)	30 (D1)
Video source	1 BNC composite input	1 BNC composite input	1 BNC composite input	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs
Audio support		Two-way	Two-way		Two-way	Two-way	Two-way on one channel	Two-way	Two-way
Alarm in-/outputs		4 configurable inputs/outputs	4 configurable inputs/outputs		4 configurable inputs/outputs	4 configurable inputs/outputs	2 configurable inputs/outputs per channel	2 configurable inputs/outputs per channel	4 configurable inputs/outputs
Intelligent video	Motion detection	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection, Audio detection, Tampering alarm, Axis Camera Application Platform	Motion detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection Audio detection Tampering alarm AXIS Camera Application Platform	Motion detection, Audio detection Tampering alarm. AXIS Camera Application Platform
Pan/tilt/zoom support	●	●	●	●	●	●	●	●	●
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords, IP filtering, HTTPS encryption, IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	PoE IEEE 802.3af Class 2, supports power output for small covert camera	DC PoE IEEE 802.3af Class 2/3, supports power output for analog camera	DC, PoE IEEE802.3af Class 3	DC PoE IEEE 802.3af Class 3	DC PoE IEEE 802.3af Class 3		DC		DC PoE IEEE 802.3af Class 3
Serial connectors	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485
Version: Standalone/Blade	Standalone	Standalone	Standalone	Standalone	Standalone	Blade	Standalone	Blade	Standalone
Other	ONVIF	Memory card slot, AVHS ⁽¹⁾ , ONVIF	Coax PTZ Control, memory card slot, AVHS, ONVIF	Memory card slot, Quad-view AVHS, ONVIF	Memory card slot, Quad-view AVHS, ONVIF	Quad-view, AVHS, ONVIF	AVHS, ONVIF	AVHS ⁽¹⁾ , ONVIF	Rugged, SFP slot, Operates in temperatures from -40 °C/-40 °F to 75 °C /167 °F, memory card slot, Quad-view AVHS, ONVIF
Axis Part #	0298-001	0288-004	0518-004	0415-004	0417-004	0418-001	0291-004	0354-001	0487-001
MSRP	\$249	\$399	\$499	\$399	\$499	\$499	\$899	\$999	\$899

Axis video encoders

	6- and 16-channel video encoders			
	AXIS M7016	AXIS P7216	AXIS Q7406	AXIS Q7436
				
Video compression	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG	H.264 Motion JPEG
Max video resolution (pixels)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)	D1: 720x480 (NTSC) 720x576 (PAL)
Frames per second H.264 (NTSC) in maximum resolution	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	60 (D1) per channel
Frames per second Motion JPEG (NTSC) in maximum resolution	30 (D1) per channel	30 (D1) per channel	30 (D1) per channel	60 (D1) per channel
Video source	16 BNC composite inputs	16 BNC composite inputs	6 BNC composite inputs	6 BNC composite inputs
Audio support		Two-way		
Alarm in-/outputs		4 configurable inputs/outputs	2 configurable inputs/outputs per channel	2 configurable inputs/outputs per channel
Intelligent video	Motion detection Tampering alarm	Motion detection Audio detection Tampering alarm	Motion detection Tampering alarm AXIS Camera Application Platform	Motion detection Tampering alarm AXIS Camera Application Platform
Pan/tilt/zoom support	●	●	●	●
Security	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption IEEE 802.1X	Multi-level passwords IP filtering HTTPS encryption	Multi-level passwords IP filtering HTTPS encryption
Network	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS	IPv4/v6, QoS
Power	AXIS PS-P power supply	AXIS PS-P power supply		
Serial connectors	RS-422/RS-485	RS-422/RS-485	RS-485	RS-485
Version: Standalone/Blade	Standalone	Standalone	Blade	Blade
Other	Memory card slots, Quad-view AVHS, ONVIF	SFP slot, Memory card slots, Quad-view AVHS, ONVIF	AVHS, ONVIF	AVHS, ONVIF
Axis Part #	0541-004	0542-004	0289-001	0584-001
MSRP	\$1299	\$1599	\$1499	\$1199

Rack solutions

Designed for high-density installations, Axis video encoder rack solutions accommodate multiple video encoder blades in the same rack.

	AXIS 291 1U Video Server Rack	AXIS Q7920
		
Number of slots	3	14
Blades supported	AXIS 241Q, AXIS 241S, AXIS 243Q, AXIS Q7406, AXIS Q7414, AXIS P7224, AXIS Q7436	AXIS Q7406, AXIS Q7414, AXIS P7224, AXIS Q7436
Maximum number of channels	18	84
Rack size	1U	5U
Rack width	19"	19"
Built-in power supply	Power supply	Two redundant power supplies
Network	One Ethernet 10BASE-T/100BASE-TX/ 1000BASE-T (Gigabit Ethernet) port	Four Ethernet 10BASE-T/100BASE-TX/ 1000BASE-T (Gigabit Ethernet) ports, Four SFP slots
Axis Part #	0267-004	0575-004
MSRP	\$399	\$2599

For more information, visit www.axis.com/products/video/video_server/




AXIS Extended Warranty

AXIS Extended Warranty prolongs the standard warranty period of one or three years, to a maximum total warranty period of five years and covers cameras, video encoders and video decoders. For more information about the Axis warranty service offering, please visit: www.axis.com/warranty/

Axis product naming structure

Below is a quick guide to Axis product naming structure, which gives useful shorthand information on the product and product features.

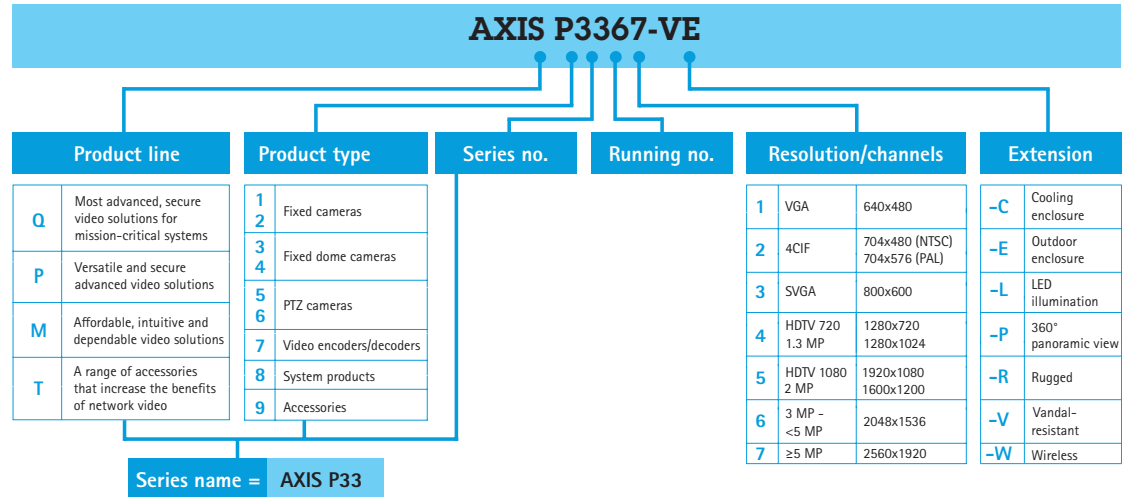







Axis network camera accessories













Fixed network camera housings

Axis offers convenient and tailor-made solutions for mounting Axis network cameras outdoors and within harsh, humid and dusty environments. To find the right housing for fixed network cameras, visit www.axis.com/products/cam_housing/fixed_housings_us.htm. For dome network cameras, the correct housings can be found at www.axis.com/products/cam_housing/dome_housings_us.htm







Cabinets and Enclosures

Axis Part #	Product	Compatible with:	MSRP
 5021-101	AXIS T97A10 Enclosure	AXIS P7701, AXIS P8221, AXIS Q7401	\$84
 5900-151	AXIS T98A15-VE Surveillance Cabinet	Standalone	\$269
 5900-161	AXIS T98A16-VE Surveillance Cabinet	AXIS M11-E, AXIS P13-E, AXIS Q16-E, AXIS Q1755-E, AXIS Q19-E	\$269
 5900-171	AXIS T98A17-VE Surveillance Cabinet	AXIS P33-VE/LVE, Q1765-LE	\$269
 5900-181	AXIS T98A18-VE Surveillance Cabinet	AXIS P33/M32 Series with pendant kit, AXIS T91B61 Wall Bracket, supporting AXIS Q60 and AXIS P55	\$269
 5900-321	AXIS T98A19-VE Surveillance Cabinet	AXIS P5414-E, AXIS P5415-E	\$269

Casings and Covers


























Axis Part #	Product	Compatible with:	MSRP
 5503-141	Black casing with clear transparent cover	AXIS P3353, AXIS P3354, AXIS P3363-V, AXIS P3364-V	\$29
 5503-151	Black casing with clear transparent cover	AXIS P3346, AXIS P3346-V, AXIS P3367-V, AXIS P3384-V	\$29
 5503-191	Black casing with smoked dome	AXIS M3203-V, AXIS M3204-V, AXIS P3301-V, AXIS P3304-V	\$29
 5500-821	Black casing with clear transparent cover		\$29
 5005-011 ^(a) 5005-001 ^(b)	Casing with transparent cover Clear ^(a) /Smoked ^(b)	AXIS M3203, AXIS M3204, AXIS P3301, AXIS P3304	\$29 ^(a) \$29 ^(b)
 5005-031 ^(a) 5005-041 ^(b)	Drop ceiling mount kit with transparent cover Clear ^(a) /Smoked ^(b)		\$59 ^(a) \$59 ^(b)
 5504-051	AXIS T94H05L Recess Mount-L	AXIS P3364-L	\$69
 5503-891	AXIS T94B01L Recessed Mount	AXIS M3004-V, AXIS M3005-V	\$58
 5503-901	AXIS T94F01L Recessed Mount	AXIS M3006-V, AXIS M3007-PV, AXIS M3024-LVE, AXIS M3025-VE, AXIS M3026-VE	\$89
 5005-051 ^(a) 5005-061 ^(b)	Vandal-resistant casing with transparent cover Clear ^(a) /Smoked ^(b)	AXIS M3203-V, AXIS M3204-V, AXIS P3301-V, AXIS P3304-V	\$69 ^(a) \$69 ^(b)
 5502-181 ^(a) 5502-191 ^(b) 5502-201 ^(c) 5502-341 ^(d)	Colored casing with clear transparent cover - 10 pack Black ^(a) / Silver ^(b) /Gold ^(c) /Mix of colors ^(d)	AXIS M3011, AXIS M3014	\$149 ^(a) \$149 ^(b) \$149 ^(c) \$149 ^(d)
 5503-601 ^(a) 5503-591 ^(b)	Covers (skins) 10 pack White ^(a) /Black ^(b)	AXIS M3004-V, AXIS M3005-V	\$99 ^(a) \$99 ^(b)

Media Converters

Axis Part #	Product	Compatible with:	MSRP
 5026-401	AXIS T8640 Ethernet over Coax Adaptor PoE+	Supports Axis Network Video Products	\$414
 5027-421	AXIS T8641 Ethernet over Coax Base PoE+	Supports Axis Network Video Products	\$207
 5028-411	AXIS T8642 Ethernet over Coax Device PoE+	Supports Axis Network Video Products	\$207
 5029-034	AXIS T8003 PS57	Power supply for AXIS T8640 Ethernet over Coax Adaptor PoE+	\$54
 5025-281	AXIS T8129 PoE Extender		\$199
 5027-041	AXIS T8604 Media Converter Switch		\$399
5028-051	AXIS T8605 Media Converter Switch		\$449

Notations (a) and (b) refer to the corresponding product models for the column; (1) AXIS Q6032-E Pendant Kit included; (2) Requires mounting tool (21776)
For more information, visit www.axis.com/products/video/accessories

Mounting Accessories

Axis Part #	Product	Compatible with:	MSRP
 0217-031	VT Wall Bracket Internal Cable WBOVA1		\$36
 0217-101	VT Corner Mount WCWA	AXIS T92A10/T92A20	\$59
 0217-081	VT Pole Mount Adapter WSFPA		\$68
 0217-051	VT Wall Bracket Adapter Plate WCPA		\$109
 5026-411	AXIS T8640 Wall Mount Bracket	AXIS T8640 Ethernet over Coax Adaptor PoE+	\$13
 5017-041	AXIS T91A04 Camera Holder 3/4" NPS	AXIS M11 Series, M3004-V, M3005-V, AXIS M3006-V, AXIS M3007-P, AXISM3007-PV, AXIS M50 Series, AXIS Q16 Series, AXIS P13 Series, AXIS Q1755/-E Series, AXIS T91B63 Ceiling Bracket, AXIS T91B62 Parapet Mount, AXIS T91B61 Wall Bracket	\$29
 5017-051	AXIS T91A05 Camera Holder 1.5" NPS		\$29
 5026-421	AXIS T8640 Rack Mount Bracket	AXIS T8640 Ethernet over Coax Adaptor PoE+	\$62
 5504-621	AXIS T91B61 Wall Bracket ⁽¹⁾ Includes mounting plate - White		\$99
 5504-641	AXIS T91B64 Corner Bracket		\$79
 5504-631	AXIS T91B67 Pole Bracket ^(1,2)	AXIS 216FD Pendant Kit, AXIS P33 Series Pendant Kit, AXIS P33-VE Series Pendant Kit, AXIS P5532, AXIS P5532-E, AXIS P5534, AXIS P5534-E, AXIS Q604X/-E Series	\$99
 5017-631	AXIS T91A63 Ceiling Bracket ⁽¹⁾		\$119
 5017-621	AXIS T91A62 Parapet Mount ⁽¹⁾		\$189
 5504-691	AXIS T91C61 Wall Mount Stainless Steel	AXIS Q60-S	\$449
 5502-021 ^(a) 5502-011 ^(b)	AXIS 216FD Pendant Kit White ^(a) /Black ^(b)	AXIS M32 Series, AXIS P3301, AXIS P3301-V, AXIS P33041, AXIS P3304-V	\$39 ^(a) \$39 ^(b)
 5502-351	AXIS P33 Series Pendant Kit	AXIS P33 Series	\$39
 5502-321	AXIS P33-VE Series Pendant Kit	AXIS P33-VE Series	\$49
 5502-431	AXIS T94A01D Pendant Kit	AXIS P55 Series, AXIS Q60 Series <i>Already included with most T91B Brackets. Only needed to mount w/w non-T91B Brackets</i>	\$49
 5503-911 ^(a) 5504-531 ^(b)	AXIS T94B01S Mnt Bracket 10 pcs White ^(a) /Black ^(b)	AXIS M3004-V, AXIS M3005-V (Network Cable Coupler included)	\$49
 5504-701 ^(a) 5504-581 ^(b)	AXIS T91A47 Pole Mount 60-110mm ^(a) , 110-400mm ^(b)	AXIS M11-E, AXIS P13-E, AXIS Q16-E, AXIS Q17-E/-LE, AXIS Q19-E, AXIS M3006-V, AXIS M3007-P/-PV, AXIS M30-VE/LVE, AXIS P33/-V/-VE/-LVE series, AXIS T92E, AXIS T93E05, VT Wall Bracket (0217-031)	\$69 ^(a) \$79 ^(b)
 5503-971	AXIS T91A27 Pole Mount 10 pcs	M3004-V, M3005-V, M3006-V, M3007-P/-PV	\$29
 5504-501	AXIS T91A50 Telescopic Ceiling Mount	Compatible w/all AXIS Pendant Kits 1.5"NPT and T91A05	\$199
 5504-511	AXIS T91A51 Ceiling Mount	Compatible w/all AXIS Pendant Kits 1.5"NPT and T91A05	\$119
 5503-881	AXIS T94F01D Pendant Kit	AXIS M30 Series Indoor Pendant Kit (Network Coupler included)	\$39
 5900-021	AXIS T94F02D Pendant Kit	AXIS M30 Series Outdoor Pendant Kit for use with T91A brackets or 1.5"NPT threaded pipes	\$39

Not sure which accessory you may need? Use our Accessory Selector Tool in selecting compatible accessories for your cameras.
Visit www.axis.com/products/video/accessories/configurator to start choosing your accessories.

Accessories

Video management software

Illuminators



White light and infrared illuminators for indoor/outdoor surveillance in low light or complete darkness. Fixed dome IR-LEDs for outdoor versions of AXIS P33 Series.
For more information visit www.axis.com/products/cam_irillum/index.htm

Power over Ethernet Midspans and Splitters



Axis Power over Ethernet (PoE) and High PoE midspans and splitters offer an easy, cost-effective solution for powering network video products without the need for power outlets and electrical cabling.

Power over Ethernet Midspans	Axis Pt. #	MSRP
AXIS T8120 1-port (15 W)	5026-204	\$59
AXIS T81B22 (30 W)	5023-121	\$99
AXIS T8123-E Outdoor (30 W)	5030-234	\$249
AXIS T8124 High PoE 1-port (60 W)	5700-401	\$149
AXIS T8124-E Outdoor (60 W)	5031-244	\$319
8-port	5012-004	\$599
16-port	5012-014	\$799
Power over Ethernet Active Splitters	Axis Pt. #	MSRP
AXIS PoE Active Splitter 5V	5008-001	\$59
AXIS T8126 High PoE 12V	5014-501	\$89
AXIS T8128 High PoE 24V	5014-511	\$89

AXIS T83 Microphones



AXIS T83 Microphones are compact and discreet with high-performance in all scenarios. They are compatible with Axis network video products and offer great detail and resolution. They are suitable for indoor installation in both large and restricted areas.

	Axis Pt. #	MSRP
AXIS T8353A Microphone 3.5mm	5032-531	\$449
AXIS T8353B Microphone Phantom Power	5033-541	\$449
AXIS T8351 Microphone 3.5mm	5031-511	\$139

AXIS T8310 Video Surveillance Control Board



AXIS T8310 Control Board is a modular system comprising of AXIS T8311 Joystick, which gives accurate control of PTZ functions of network cameras; AXIS T8312 Keypad, used for navigating between workspaces, cameras, views and PTZ presets; AXIS T8313 Jog Dial, used for navigating through recorded video. Each unit can be purchased and used separately or together.

Axis Pt. # 5020-001 \$1149

AXIS P7701 Video Decoder



AXIS P7701 Video Decoder provides a simple monitoring solution by enabling analog or digital monitors to connect to and display live video from Axis network cameras and video encoders.

Axis Pt. # 0319-004 \$499

AXIS P8221 Network I/O Audio Module



AXIS P8221 provides eight I/O ports and audio capabilities to a network video surveillance system that either does not have such support or requires additional support.

Axis Pt. # 0321-004 \$349

AXIS T8414 Installation Display



AXIS T8414 is a battery-powered handheld device that greatly simplifies image setting adjustments, PTZ control, video clip recordings and playback of clips previously downloaded or recorded with AXIS T8414. Snapshots and video clips can be saved to internal memory, or to a connected MicroSD or USB device.

Axis Pt. # 5900-144 \$649

Pan-Tilt Motor



YP3040 Pan-Tilt Motor can be used with AXIS Q1755, AXIS Q1910/-E and AXIS Q1921 cameras to enable basic pan and tilt capability. The motor can be mounted on walls, both indoors and outdoors. Will not support Guard Tour. PS-24 Required Sold Separately. Supports P1353/P1354 through Serial Connectors.

Axis Pt. # 5502-461 \$499

AXIS Camera Station

AXIS Camera Station is a complete monitoring and recording system that is perfect for small- to mid-sized installations. It offers easy installation and setup with automatic camera discovery, a powerful Configuration Wizard and efficient management of the Axis network video products in the system.

	Axis Pt. # / eLicense Pt. #	MSRP
10-camera base license	0202-004 / 0202-601	\$999
4-camera base license	0202-054 / 0202-600	\$649
20-camera add on license	0202-264 / 0202-607	\$1979
5-camera add on license	0202-014 / 0202-603	\$499
1-camera add on license	0202-034 / 0202-602	\$99
1-year software upgrade	0202-024 / 0202-604	\$149

AXIS Camera Management

Powerful and efficient installation and management tool for Axis network video products.

For a free download, visit www.axis.com/products/cam_mgmt_software

Axis' Application Development Partners

A wide variety of software solutions for video surveillance, remote monitoring or broadcasting are available from more than 800 Axis Application Development Partners.

AXIS Video Hosting System

AXIS Video Hosting System (AVHS) enables a hosted monitoring and recording service to be managed and distributed to you by a service provider. With an Internet connection and an Axis camera as the only requirements, you can enjoy a trouble-free monitoring solution over the Internet.

For more information visit www.axis.com/hosting/

AXIS Camera Station One

Software solution for viewing and recording live video from a single Axis network camera. Available for free download.

For more information, visit www.axis.com/products/video/software/

AXIS Camera Companion

AXIS Camera Companion is the market's easiest video surveillance solution. Perfect for small systems, it offers future-proof IP advantages such as HDTV image quality. With AXIS Camera Companion, all video is recorded on SD cards in the cameras, and no DVR or server is necessary

For more information, visit www.axis.com/products/cam_companion_software


Axis Certification Program



Take the challenge! Showcase your expertise in network video with the global standard for individual certification from Axis. Register for the Axis Certification Program - then pass our advanced-level test to become an Axis Certified Professional.

Axis offers both online and classroom-based training to help you acquire the knowledge needed to pass the exam. Go to www.axis.com/certification to find our online learning center and for more information on how to register.

Technical Services





Axis stays with you all the way.

At Axis, we help our partners and end customers find solutions. Start with our support web at www.axis.com/support for your product questions. With more than 400 FAQs in our extensive database, you are sure to find the product details you need. You can also submit advanced queries related to your Axis solution using the Online Helpdesk.

Physical Access Control Systems

Axis Intelligent Video

	AXIS A1001 Network Door Controller	AXIS Entry Manager
		
Highlights	Open API for software integration, Scalable and future-proof, Support for most reader types (Wiegand, RS485, OSDP), Up to 2 readers per controller	Targets 1-14 door solutions, Supports 1-33 ⁽¹⁾ controllers, User-friendly administration, Easy to add controllers to the system, Flexible and scalable configuration
Credentials	Up to 15,000 with third-party access management software depending on server capacity	Up to 400
Power	Power over Ethernet IEEE 802.3af/802.3at Type 1 Class 3 Power out lock: 2x 12 V DC, max 500 mA ⁽¹⁾	Embedded on AXIS A1001 See previous power requirements
Features	UL 294 (pending), UL 2043 (Plenum-rated), Password protection, IP address filtering, HTTPS encryption, IEEE 802.1X network, access control, Digest authentication, User access log, conformant to ONVIF Profile C, with FW 1.15; Software configuration and basic access control management through Internet Explorer, Firefox, Chrome, or Safari	Events and alarms including Tamper detection, Event log, Event actions, Event triggers; Unlimited access schedules; Drag and drop functionality; Configuration wizard
Warranty	Axis 3-year warranty and AXIS Extended Warranty option	Axis 3-year warranty and AXIS Extended Warranty option
Axis Part #	0540-001	Embedded on AXIS A1001
MSRP	\$599	Built-in software

Active Tampering Alarm	Audio Detection	Autotracking
The Active Tampering Alarm functionality enables the detection of disrupted camera operation by automatically alerting the operator when a camera is manipulated in any way.	This application detects noise – such as the breaking of a window or voices – and uses this as a trigger to transmit and record video, or to alert operators of suspicious activities. Please note that local legislation or codes of practice sometimes limits the use of this feature.	Axis' autotracking enables a PTZ dome camera to automatically follow a moving object in a scene. This ensures that when an incident occurs, the right part of the scene is recorded with enough image quality to enable identification.
AXIS Cross Line Detection	AXIS Video Motion Detection 2.1	Gatekeeper
AXIS Cross Line Detection is especially suitable for general monitoring of entrance and exit points in low-traffic areas, detecting objects such as persons and vehicles that cross a defined virtual line. <i>For more information, visit www.axis.com/products/crossline/</i>	AXIS Video Motion Detection 2.1 is an application specially suitable for motion detection for indoor or outdoor installations with low traffic areas. The application integrates with the camera's internal event manager, enabling various system notifications. <i>For more information, visit www.axis.com/products/video_motion_detection/</i>	Gatekeeper zooms in on an object as it enters the center of the image, then zooms out after a pre-set of seconds. Advanced Gatekeeper offers the same feature but the object does not have to be in the center of the image. Active Gatekeeper includes tracking when the object moves.
AXIS Camera Application Platform		
AXIS Camera Application Platform enables compatible applications, typically intelligent video applications, to be downloaded to Axis network video products. <i>For more information, visit www.axis.com/techsup/cam_servers/dev/application_platform/</i>		

Please reference datasheets for more information.


(1) Power consumption dependent, max load for readers and other equipments is 7.5 W with PoE and 14 W with 10-30 V DC

Axis innovates

As the world leader in network video, Axis is constantly working to provide advanced technology for our network cameras. Our research and development efforts have resulted in the following technologies, which have enhanced our cameras' capabilities.


Corridor Format

Corridor Format allows you to get a vertically oriented, "portrait"-shaped video stream, which maximizes image quality while eliminating bandwidth and storage waste.




Lightfinder Technology

Lightfinder technology offers high light sensitivity, excellent image quality with low noise but a wealth of details, and better color reproduction in low light.



Wide Dynamic Range

Wide Dynamic Range (WDR) is a feature in some Axis network cameras that incorporates techniques for handling a wide range of lighting conditions in a scene.



About Axis Communications

Axis offers intelligent security solutions that enable a smarter, safer world. As the global market leader in network video, Axis is driving the industry by continually launching innovative network products based on an open platform – delivering high value to its customers and carried through a global partner network. Axis has long-term relationships with partners and provides them with knowledge and ground-breaking network products in existing and new markets.

Axis has more than 1,600 dedicated employees in more than 40 countries around the world, supported by a network of over 65,000 partners across 179 countries. Founded in 1984, Axis is a Sweden-based company listed on NASDAQ OMX Stockholm under the ticker AXIS.

For more information about Axis, please visit our website www.axis.com.

Distributed by: