


Precision Cooling
For *Business-Critical Continuity™*

Liebert® CRV™ Row-Based Cooling

Intelligent Precision Cooling For Data Center Equipment

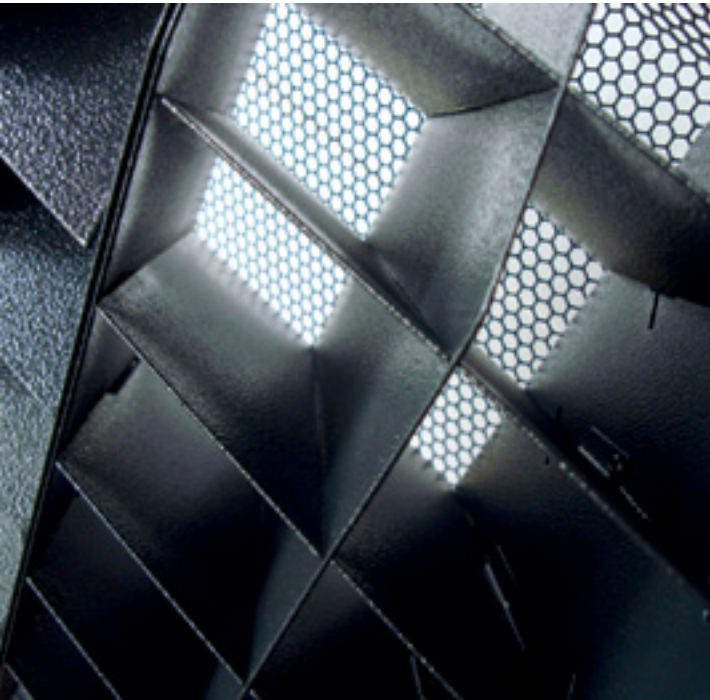

The Intelligent Data Center Cooling Solution: Liebert CRV

Trust the industry leader in Precision Cooling to deliver the right solution for your data center:

In 2002, Emerson Network Power's Liebert XD family was the industry's first row-based cooling system. Now, we have taken more than 40 years of engineering experience and the most advanced technologies to design the Liebert CRV row-based precision cooling system. For maximum application flexibility, Liebert CRV is available in multiple capacities and configurations. 600mm wide: 20kW or 35kW air or water/glycol-based, or 40kW chilled water-based cooling units; 300mm wide: 30kW chilled water unit.

Always informed:

The Liebert iCOM display shows the inlet temperature of the protected racks, tracks other critical information that keeps IT personnel up to date on system operation, and allows the Liebert CRV to optimize cooling for the rack-based equipment.

Easy to deploy and maintain:

Row-based placement puts cooling at the heat source, with adjustable baffles on the 24 in. (600mm) wide model that ensure cool air reaches the servers, while logical placement of reliable components results in ease of service.

Intelligently efficient:

Variable speed fans, variable capacity digital scroll compressor on compressorized models and the advanced Liebert iCOM control system all work together to provide energy savings over traditional perimeter cooling systems.





600mm (24") cabinet:
20 or 35kW air or water/
glycol cooled; 40kW
chilled water cooled.

300mm (12") cabinet:
30kW chilled water
cooled.

Liebert CRV delivers Efficiency Without Compromise™

Efficiency Without Compromise provides a path to optimize data center infrastructure around design, operating and management efficiencies – while maintaining or improving availability. This is achieved through the proper selection and utilization of cooling, power and monitoring technologies, supported by key services and local expertise.



Put Precision Cooling In The Row To Reduce Energy Consumption and Optimize Operating Conditions For IT Equipment

The Liebert CRV is a precision cooling system that installs within a row of data center racks—close to the server heat source—for the most efficient cooling of critical IT equipment.

The rack-sized Liebert CRV provides high capacity cooling in a small footprint and features the Liebert iCOM Control System that modulates unit performance in real-time, based on conditions in the row. Monitoring up to 10 racks with 20 sensors, the Liebert CRV precisely controls air temperature, humidity and filtration in the surrounding racks.



Liebert IntelliSlot™ Communication Cards can be accessed without entering the high voltage panel and allow the system to communicate with remote infrastructure management systems.



R-410A Refrigerant is environmentally friendly and meets the latest government standards.

Liebert iCOM® Control presents up to 11 temperature measurements and unit performance in an easy to understand graphical summary.

Rack Sensors provide two temperature readings per rack to ensure the proper amount of cold air is provided to eliminate hot spots.

Adjustable Baffles on the 24 in. (600mm) wide model direct airflow right, left or both directions, allowing you to easily change the airflow distribution as your cooling needs change.

Slanted, blue hydrophilic cooling coil with intermediate drain pans, quickly disbursts condensation, thus preventing carryover of water into the cold aisle.

Variable EC Fans regulate airflow and reduce the fan input power; resulting in up to 50% less power used by the fans compared to traditional perimeter cooling.

High Performance Air Filters are easily accessed through the back of the unit.



Digital Scroll Compressor on compressorized models enables the variable cooling capacity to precisely match changing cooling demand without cycling on and off, reducing energy consumption and extending compressor life.

Liebert iCOM Controls: Optimized Performance, Reliability, and Efficiency



The Liebert iCOM control system provides advanced control and monitoring capabilities to Liebert CRV units, allowing up to 32 cooling units to work together as a single system to optimize room performance and improve energy efficiency. Liebert iCOM controls offer a variety of advantages, including icon-based navigation, adjustable control algorithms, and data center monitoring capabilities.

Control

- **Advanced control algorithms** allow the airflow and cooling to be modulated independently, eliminating excessive operations.
- **Temperature sensors** attached to server racks allow the optimal amount of air and cooling to be provided without any increased risk for hot spots.
- **Multiple Liebert CRV units communicate with each other** to optimize system performance while reducing noise and airflow, to provide a work-friendly environment.
- **Six control modes of operation** allow the Liebert CRV to be customized for any application.

Monitoring

- **Six selectable status screens** allow you to customize how system information is presented.
- **Up to 20 rack temperatures may be summarized** using bar graphs or a drawing of the data center on the local display, or all data may be reported remotely, providing users with a built-in mini-monitoring system.
- **All unit information may be reported remotely** through a variety of protocols, including HTTP, SNMP, RS-485 Modbus, BACnet IP and Liebert SiteScan Web 4.0 Protocol.

Predictive Wellness/Maintenance

- **Enhances reliability with predictive analysis** of components and performance – advance notice allows proactive management of system maintenance.
- **Event logs store the last 400 messages** to enrich unit history and enhance support.


Service and Spare Parts History

- **On-board service history** allows prompt access to records for service personnel.
- **On-board spare parts list** provides convenient identification of the appropriate unit spare parts and part numbers for faster service and support.

The **Large Graphic Display** features a 320x240 dot matrix screen operates with intuitive images rather than pages of text. This display can be used to control a single cooling unit or any cooling unit on a network.



Bar graphs show the inlet temperature of every rack with a 2T temperature sensor.

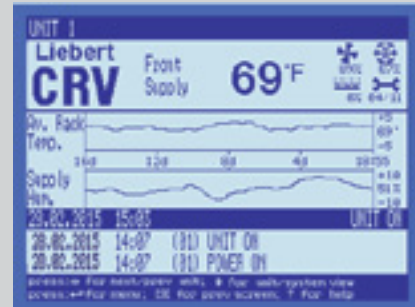

Line graphs show the historical temperature and humidity conditions for the past 8 minutes to 16 days.



A single view shows the average, minimum, and maximum temperature of every 2T rack sensor in a single- or multi-unit system.

Designed For Reliability and Energy Efficient Operation

Reduce operating costs and energy consumption

Through the use of advanced control algorithms, the Liebert iCOM control system is able to leverage the energy efficiency of the EC plug fans and digital scroll compressor to provide greater energy savings at the system level than other row-based units.



Rack Sensors

Two temperature sensors are placed at the inlet of up to 10 racks. Liebert CRV reads the sensors and adjusts airflow and temperature to ensure the proper operating conditions for the rack equipment.

Liebert IntelliSlot Communication Cards

The Liebert CRV includes two Liebert IntelliSlot card slots for easy plug-in of optional communication cards:



- **Liebert IntelliSlot Web Card** — delivers SNMP and HTTP web-management communications capabilities for monitoring and control through your existing network with no additional software required.
- **Liebert IntelliSlot 485 Communication Card** — allows remote monitoring and control of Liebert CRV using RS-485 Modbus through Liebert SiteScan Web or your existing Building Management System.
- **Liebert IntelliSlot SiteLink-E Card** — Liebert SiteScan Web 4.0 Protocol Card for SiteLink-E connectivity from Liebert CRV.
- **Liebert IntelliSlot Building Management Card** — IntelliSlot Modbus IP/BACnet IP card for Liebert CRV.



Digital Scroll Variable Capacity Compressor

The exclusive Digital Scroll Compressor uses the latest control technology to deliver precise operation and significantly higher energy efficiency than other compressor technologies. In addition to the advantage of the dependable scroll design, Digital Scroll technology provides infinitely variable capacity modulation between 20–100% to enable the output to precisely match the changing cooling demands of the room.

- More efficient than traditional hot-gas bypass approach.
- Improved reliability by reducing compressor cycling and component wear.
- Improved performance because the compressor can easily adapt to changing load conditions and provide precise temperature control.
- Superior oil return compared to inverter-driven compressors.
- No harmonic noise issues, unlike inverter-driven compressors.



Variable Speed EC Fans

EC fan technology works to regulate airflow and reduce fan input power. You can have confidence that the EC Fans, managed through Liebert iCOM controls, deliver airflow for the optimal IT equipment operating conditions.

- Speed controllers on each motor eliminates a single point of failure.
- Additional airflow available for emergency conditions and elevation correction on 24in (600mm) wide model.



Adjustable Baffles

Modular air supply baffles on the 24 in. (600mm) wide model direct the cold air to the servers, and may be adjusted anytime cooling needs change. When Liebert CRV is installed at the end of a row, the air is directed down the aisle toward the servers – not lost to the room, reducing the hot aisle temperature.

Liebert CRV: Reliable, Flexible and Economical

All row-based cooling systems are not created equal. Compare Liebert CRV features to other technologies:

Key Benefits

Flexibility

- Horizontal airflow cooling design is suitable for non-raised or raised floors.
- Adjustable airflow baffles on 24 in. (600mm) wide model maximize cooling to rack equipment, allowing the system to be positioned within the row or at the end of the row.
- Air, water, glycol, and chilled water systems available.
- Caster mounted for easy placement.
- Multiple units communicate with each other to improve system performance and reduce energy consumption.
- Compatible with both Emerson Network Power SmartAisle™ infrastructure, and Aisle Containment system.

Lowest Total Cost of Ownership

- Designed for higher return air temperature to maximize cooling capacity and increase efficiency.
- Only front and back access required, resulting in minimized installation and service time.
- Digital Scroll compressor and variable speed EC fans operate efficiently to reduce energy consumption and provide longer component life.
- Compact cabinet minimizes floor space requirements.

High Availability

- Self-adapts to changing conditions to provide 24/7 precision environmental control: cooling, humidity control (on 24 in. (600mm) wide model) and air filtration.
- Liebert iCOM control provides alerts for preventive maintenance before issues occur.
- Variable capacity Digital Scroll compressor adapts to load and eliminates compressor cycling, greatly increasing compressor life.
- Built for both ease of installation and speed of maintenance. All components are easily accessible from the front and rear of unit, eliminating side access.
- Special attention has been given to the design to only require front and rear access for servicing all internal components.

Ideal Applications

- Small to medium-sized data centers
 - From 2 to 24 racks
 - Optimal for cold/hot aisle configurations
- Heat density up to 10 kW/rack without containment.
- Raised and non-raised floors.
- Rooms with a low ceiling where air cannot be ducted.
- SmartAisle™ containment system.
- Spot cooling in large data centers.

| Product feature | 24 in. (600mm) Wide Model | 12 in. (300mm) Wide Model |
|--|---------------------------|--|
| Liebert iCOM control | + | + |
| Digital Scroll Compressor | + | |
| Variable speed EC fans | + | + |
| Adjustable Air Supply Baffles | + | |
| Install at the end of the row or within the row | + | containment required at the end of row for proper airflow management |
| 2T Rack temperature sensors and humidity measurement | + | + |
| Front and rear access only | + | + |
| Low audible noise | + | |
| Hydrophilic coated coil resists water carryover | + | + |
| Reheat and humidifier | + | |
| Partial fan redundancy | + | |
| Superior Service Access Panel | + | |
| Separate component and airstream sections | + | |
| Liebert Intellislot card housings | + | + |
| Condensate pump | + | + |
| Collect 20 temperatures on 10 IT racks | + | + |

The Right Cooling Choice for a Range of Data Center Applications




Liebert CRV installs at the ends or within the row of racks on non-raised or raised floor applications.

- Ideal for hot/cold aisle configurations.
- Rows should have no missing racks and minimal cold aisle obstructions.
- Ensure obstruction exists (rack, wall, etc.) directly across from cooling unit.
- Optimal performance when used with an Emerson Network Power SmartAisle cold-aisle containment system.


Liebert CRV is available in Direct Expansion or Chilled Water Models

- Direct Expansion Models are air cooled, water cooled or glycol cooled.
- Chilled Water Models require connection to a chilled water source.


Typical Configurations

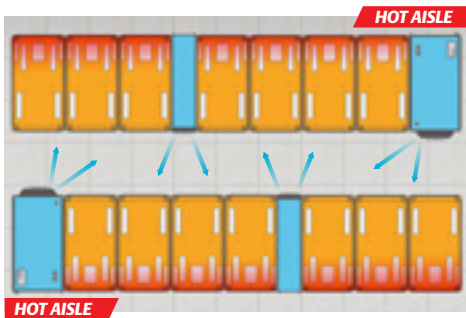

By placing Liebert CRV 600mm units at either end of the rows and inserting 300mm wide units throughout, the Liebert iCOM controls ensure that the aisle is evenly pressurized, simulating cold aisle containment.

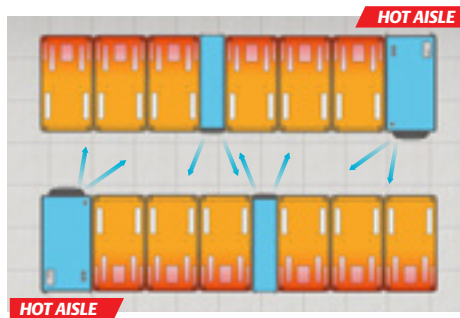


All Liebert CRV units communicate with each other via unit-to-unit networking to ensure even air distribution and optimized system efficiency.

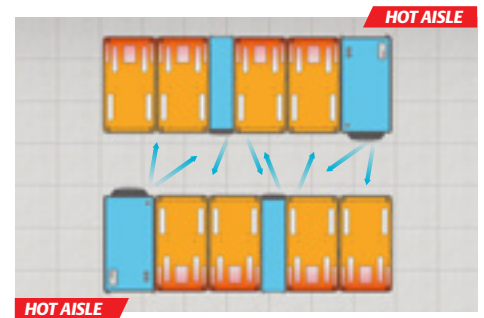


As rack densities increase, inserting additional cooling units within the row will meet cooling demand.



For data centers where heat density needs to be increased without installing a raised floor or a higher roof, the Liebert CRV and Emerson Network Power SmartAisle cold aisle containment is the ideal solution.



The Liebert CRV adapts to obstructions, such as walls, pillars, and open racks doors.

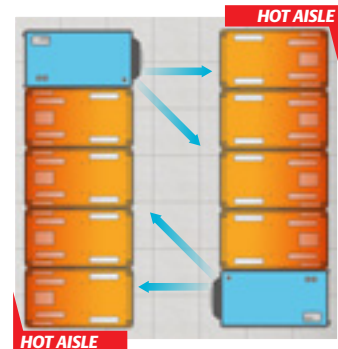

Liebert CRV systems operating in hot aisle/cold aisle configuration.

Liebert CRV Specifications

| | 24in (600mm) wide models | 12in (300mm) wide model |
|-------------------------------|---|---|
| Nominal Capacity, 50 or 60 Hz | 20 or 35kW, Air cooled 20 or 35kW, Water/Glycol cooled 40kW, Chilled water cooled | 30kW, Chilled water cooled |
| Input Voltage | 208V, 3ph, 60Hz 460V, 3ph, 60Hz 400V, 3ph, 50Hz | 208V/230V, 1ph, 60Hz 230V, 1ph, 50Hz |
| Refrigerant | R410A | N/A |
| Compressor | Digital Scroll, variable capacity 20–100% | N/A |
| Fans | Variable Speed EC Plug Fans | Variable Speed EC Propeller Fans |
| Options | Electric reheat Humidification Dual-float Condensate pump | Condensate pump |
| Controls | Liebert iCOM with large graphical display and 20 temperature sensors for 10 racks | |
| Communications | Liebert IntelliSlot Web Card: HTTP and SNMP Liebert IntelliSlot 485 Card: RS-485 Modbus Liebert IntelliSlot Building Management Card: IPBML Modbus IP / BACnet IP Liebert IntelliSlot SiteLink-E Card – Liebert SiteScan Web 4.0 Protocol Card | |
| Dimensions | Height: 79 in. (2000mm) Width: 24 in. (600mm) Depth: 43 in. (1100mm) | Height: 79 in. (2000mm) Width: 12 in. (300mm) Depth: 43 in. (1100mm) |
| Weight | Air: 20kW – 744 lbs (337kg) 35kW – 811 lbs (368kg) Water/Glycol: 20kW – 778 lbs (353kg) 35kW – 856 lbs (388kg) Chilled Water: 40kW – 733 lbs (332kg) | 365lb (166Kg) |

Emerson Network Power

Liebert Corporation
 World Headquarters
 1050 Dearborn Drive
 P.O. Box 29186
 Columbus, Ohio 43229
 United States Of America
 800 877 9222 Phone (U.S. & Canada Only)
 614 888 0246 Phone (Outside U.S.)
 614 841 6022 FAX

Emerson Network Power
 European Headquarters
 Via Leonardo Da Vinci 8
 Zona Industriale Tognana
 35028 Piove Di Sacco (PD)
 Italy
 39 049 9719 111 Phone
 39 049 5841 257 FAX

Emerson Network Power Asia Pacific
 29/F, The Orient Square Building
 F. Ortigas Jr. Road, Ortigas Center
 Pasig City 1605
 Philippines
 +63 2 687 6615
 +63 2 730 9572 FAX

liebert.com

24 x 7 Tech Support

800 222 5877 Phone
 614 841 6755 (outside U.S.)

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2012 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert is a registered trademark of the Liebert Corporation.

SL-11972 (R03/12) Printed in USA

EmersonNetworkPower.com

Emerson Network Power.

The global leader in enabling *Business-Critical Continuity™*.

- AC Power
- Embedded Computing
- Outside Plant
- Racks & Integrated Cabinets
- Connectivity
- Embedded Power
- Power Switching & Controls
- Services
- DC Power
- Infrastructure Management & Monitoring
- **Precision Cooling**
- Surge Protection