



Blind Hole Mount



# Bundling & Securing

## Blind Hole Mount

A “blind hole” goes to a specific depth without continuing through the opposite end. It prevents a screw or other fastener from poking through and potentially damaging other components. Turning screws and adding extra hardware can be time consuming. Blind Hole Mount Cable Ties accelerate and simplify the mounting process. No tools needed – simply press for an instant, secure attachment.

### Blind Hole Mount Cable Ties

#### For Threaded and Nonthreaded Holes

HellermannTyton Blind Hole Mount Cable Ties for threaded and nonthreaded holes offer an easy-to-use method for bundling and affixing cables. The two-piece design includes a heat stabilized cable tie and formula-matched, 1/4" mount that features a low insertion force and aggressively resists pull off. Performs equally well in threaded or nonthreaded blind holes. Mount can slide along cable tie to adjust orientation if needed. Fastener can be removed from hole using a hex driver. This ensures fastener can be reused.




#### Features and Benefits


- Delivers high extraction force for reliable performance, yet it's easy to install.
- Reusable fastener can be removed from threaded or nonthreaded holes using a 5/16" hex driver.
- Heat stabilized material provides excellent resistance to high temperatures.

<b>MATERIAL</b>	<b>Polyamide 6.6 heat stabilized (PA66HS)</b>
Operating Temperature	-40°F to +257°F (-40°C to +125°C)
Flammability	UL 94 V2
Color	Black

#### Outside Serrated

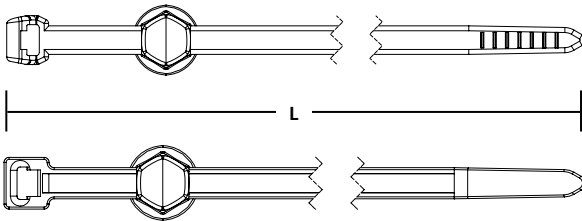

#### Inside Serrated

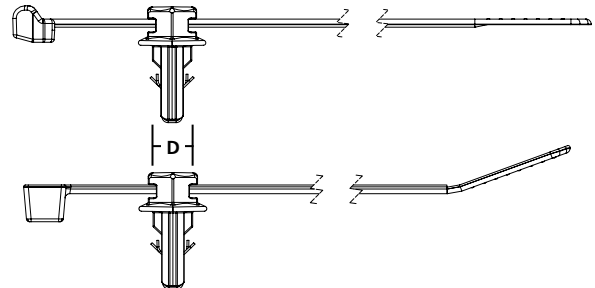


**RoHS** ✓


PART NO.	Type	Diameter (D)		Fixing Hole Depth Min.		Bundle (Ø) Max.		Bundle (Ø) Min.		Length (L)		Tensile Strength Min.		Pkg Qty
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	N	
156-01807	T50SOSBHMB	0.25	(6.0)	0.5	(12.7)	1.40	(35.0)	0.10	(2.5)	6.0	(150.0)	50	225.0	500
156-01796	T50ROSBHMB	0.25	(6.0)	0.5	(12.7)	1.97	(50.0)	0.10	(2.5)	8.0	(200.0)	50	225.0	500
156-01726	T50RBHMB	0.25	(6.0)	0.5	(12.7)	1.97	(50.0)	0.10	(2.5)	8.0	(200.0)	50	225.0	500

Use Type for ordering and specification purposes.

### Instructions for Use



1. Press mount into blind hole.



2. To remove mount from blind hole:
  - a. **Offset hex-head mount:** Use a 5/16" hex driver to unscrew mount from threaded or nonthreaded blind hole, leaving cable tie intact if desired.
  - b. **Standard hex-head mount:** Cut cable tie and use a 5/16" hex driver to unscrew mount from threaded or nonthreaded blind hole.
  - c. **All-plastic mount:** Cut cable tie and rotate mount out of threaded blind hole.


### Blind Hole Mount Offset Cable Tie

#### For Threaded and Nonthreaded Holes

Blind Hole Mount Offset Cable Ties secure bundles beside the mounting hole instead of directly above it. The unique design includes a heat stabilized cable tie and formula-matched, hex-head fastener that features a low insertion force and aggressively resists pull off. Performs equally well in threaded or nonthreaded blind holes. Since cable or wire bundle is beside the fastener, the assembly can be removed using a hex driver from the mounting hole without cutting the cable tie. The fastener can then be reused.


#### Features and Benefits

- Offset mount allows wire or cable to be attached beside mounting hole instead of directly above it.
- Reusable fastener can be extracted from threaded or nonthreaded holes using a 5/16" hex driver.
- Delivers high extraction force for reliable performance, yet it's easy to install.
- Heat stabilized material provides excellent resistance to high temperatures.

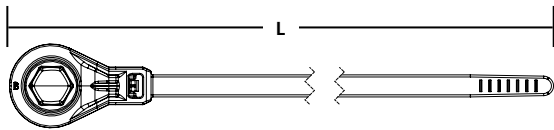

<b>MATERIAL</b>	<b>Polyamide 6.6 heat stabilized (PA66HS)</b>
Operating Temperature	-40°F to +257°F (-40°C to +125°C)
Flammability	UL 94 V2
Color	Black

RoHS

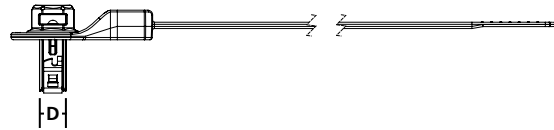

PART NO.	Type	Offset Length		Diameter (D)		Fixing Hole Depth Min.		Bundle (Ø) Max.		Bundle (Ø) Min.		Length (L)		Tensile Strength Min.		Pkg Qty
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	N	
157-00329	T50ROS BHMSO18	0.71	(18.0)	0.25	(6.0)	0.5	(12.7)	1.97	(50.0)	0.08	(2.0)	8.0	(200.0)	50.0	225.0	500

Use Type for ordering and specification purposes.


### Blind Hole Mount Cable Tie

#### For Threaded Holes

HellermannTyton Blind Hole Mount Cable Tie for threaded holes offers an easy-to-use method for bundling and affixing cables. The one-piece mount offers a low insertion force and aggressively resists pull off, for secure attachment to panel holes with thicknesses from 0.02" to 0.28" or threaded blind holes. The disc on top of the mount covers the hole and minimizes ingress of water and debris.

#### Features and Benefits

- One-piece design allows installers to mount and bundle wire or cables single-handedly.
- Fastener delivers high extraction force for reliable performance, yet it's easy to install.
- Can be unscrewed or extracted from threaded holes for easy removal.

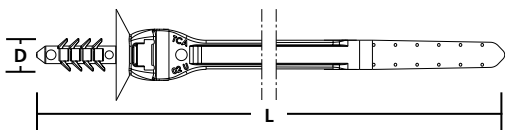


<b>MATERIAL</b>	<b>Polyamide 6.6 high impact modified, heat stabilized, UV resistant (PA66HIRHSUV)</b>
Operating Temperature	-40°F to +230°F (-40°C to +110°C)
Flammability	UL 94 HB
Color	Black

RoHS

PART NO.	Type	Diameter (D)		Panel Thickness Min.		Panel Thickness Max.		Bundle (Ø) Max.		Bundle (Ø) Min.		Length (L)		Tensile Strength Min.		Pkg Qty
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	N	
157-00112	T50ROSFTQM6	0.25	(6.0)	0.02	(0.6)	0.28	7.0	2.0	(50.8)	0.06	(1.524)	8.0	(203.2)	50.0	225.0	500

Use Type for ordering and specification purposes.

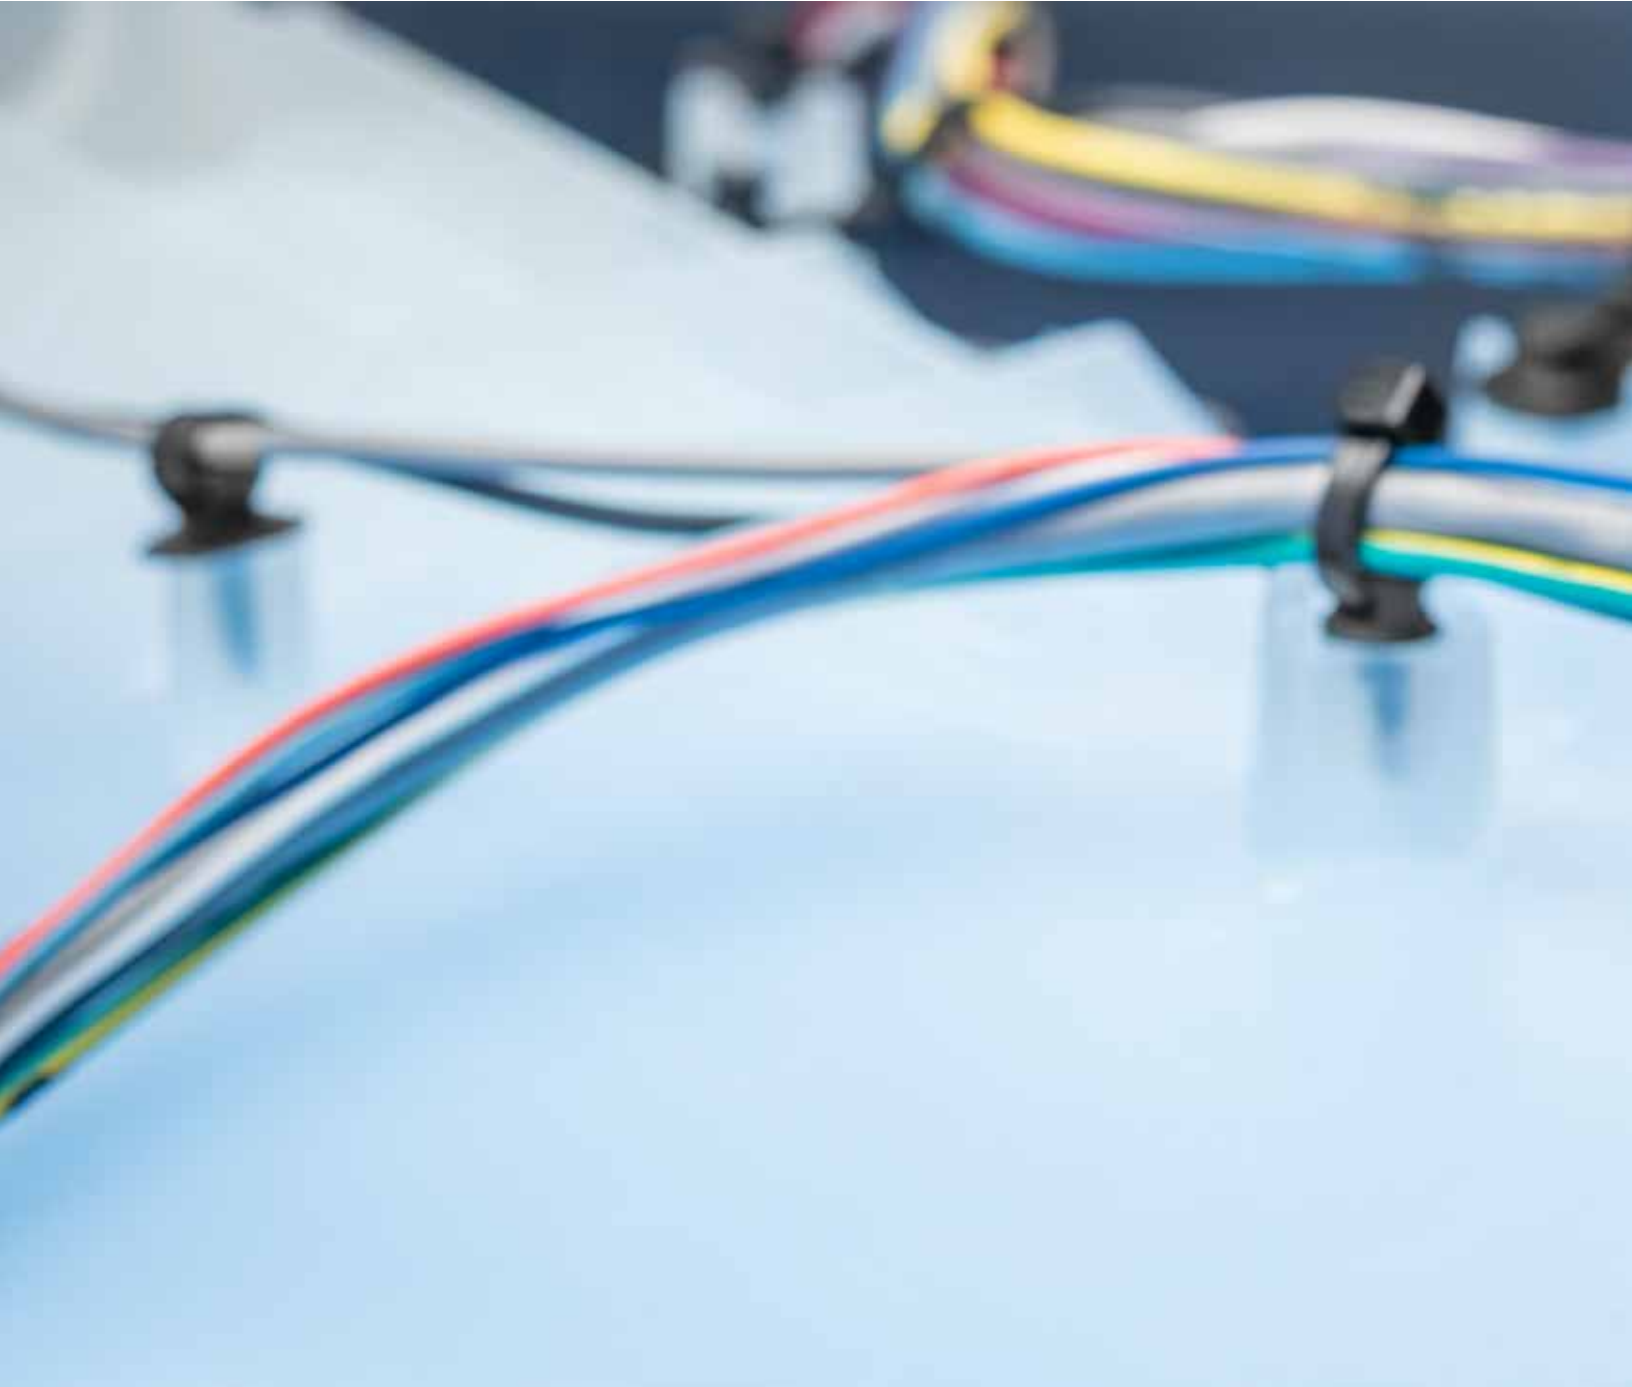

**HellermannTyton North American  
Corporate Headquarters**

7930 N. Faulkner Rd, PO Box 245017  
Milwaukee, WI 53224-9517  
Phone: (414) 355-1130, (800) 537-1512  
Fax: (414) 355-7341, (800) 848-9866  
email: [corp@htamericas.com](mailto:corp@htamericas.com)  
[www.hellermann.tyton.com](http://www.hellermann.tyton.com)

***TS16949, AS9100, ISO 9001 and ISO14001 certified***

**HellermannTyton Canada**

Unit #4, 205 Industrial Parkway North  
Aurora, Ontario L4G 4C4 Canada  
Phone: (800) 661-2461  
Fax: (800) 390-3904  
email: [sales@hellermanntyton.ca](mailto:sales@hellermanntyton.ca)

**HellermannTyton Mexico**

Anillo Periferico Sur 7980 Edificio 6A  
Parque Industrial Tecnologico II  
Santa María Tequepexpan  
Tlaquepaque, Jalisco, Mexico 45601  
Phone: 011-52-33-3-133-9880  
Fax: 011-52-33-3-133-9861  
email: [info@htamericas.com.mx](mailto:info@htamericas.com.mx)

***ISO 9001 certified***